


Ref. 11100

HSS WIDIA DIN338N



P				M		K			N				S		H		
>800	>1.000	>1.200	>1.400	>950	>1.200	>500	>800	>1.400	Al	Cu	Mg/Zn	Plastic	Ti	Ni	50 HRC	55 HRC	60 HRC
● 25-45	● 18-30	● 10-25	○ 6-9				● 30-40	● 15-20				○ 30-35					

Vc (m/mm) ● Best ○ Alternative

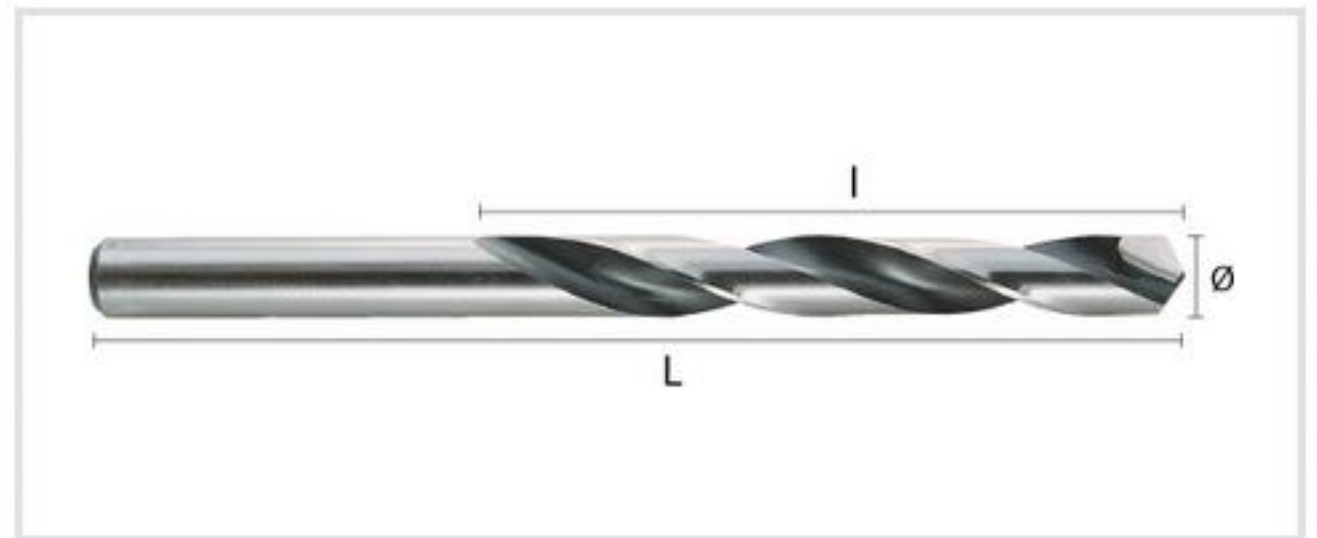

Technical Features:

- › High Speed Steel HSS with carbide insert
- › Tip of 118°
- › Helix at 30°
- › Cylindrical shan

Applications:

Soft magnetic steels, construction and cementation steels, and non-alloy and alloy carbon steels up to a resistance of 1,400 N / mm2

[BUY PRODUCT](#)