


MULTI-CHANNEL TEMPERATURE LOGGERS

DATA
OUTPUT


- Suitable for home appliances, motors, electric heating appliances, thermostats, transformers, ovens, thermal protectors, power supplies, lighting, electric power, LED and other industries
- Unit: °C/°F/K
- Channels are compatible with thermocouple types K/N/E/J/T/R/S/B.
- 4.3 inch true color LCD
- Direct numerical value reading, histogram and graphical display mode
- Upper and lower limit overrun alarm
- Independent correction per channel
- Automatic detection of open-circuit thermocouple
- Standard U disk interface, support real-time data storage
- Computer software is included

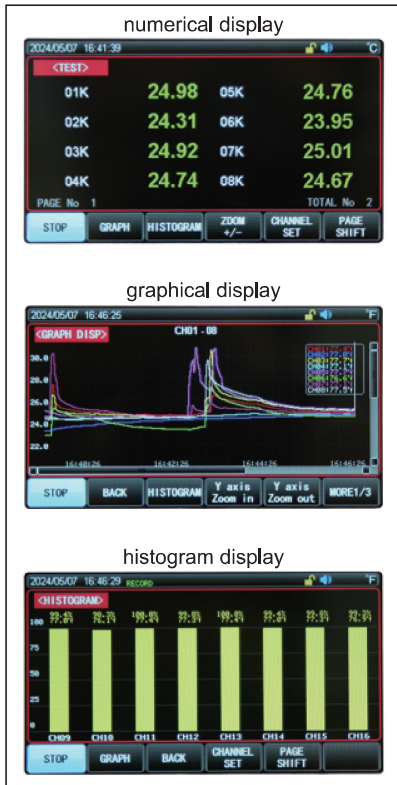

0350-MC16

K-type thermocouples (included)

computer software (included): connect to PC software via RS232 cable to collect, display and save data as .csv format

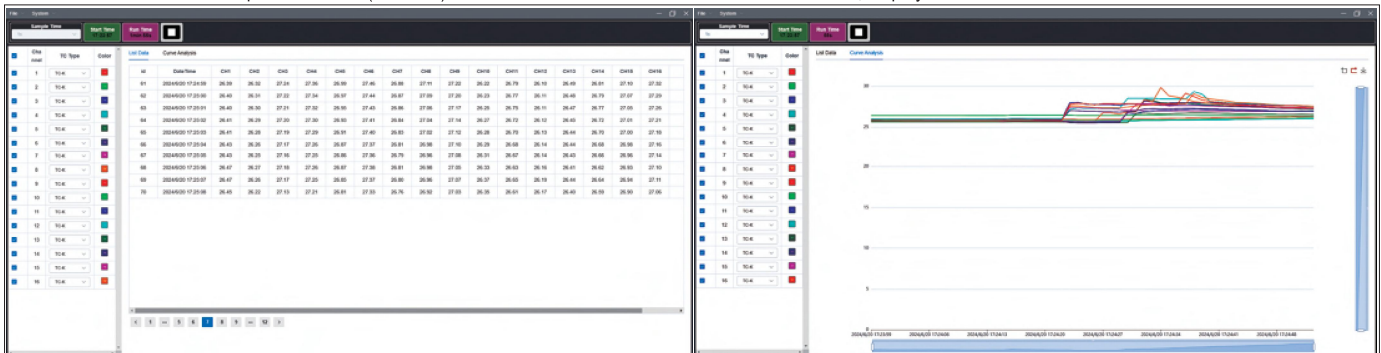

SPECIFICATION

Code		0350-MC08	0350-MC16	0350-MC32	0350-MC48
Channel number		8	16	32	48
Weight		3.5kg	3.6kg	3.7kg	3.8kg
Thermocouple type		K/J/T/E/N/S/R/B			
Temperature range (electrical signal)	type K thermocouple	-100°C~1350°C			
	type J thermocouple	-100°C~1200°C			
	type T thermocouple	-150°C~400°C			
	type E thermocouple	-100°C~850°C			
	type N thermocouple	-100°C~1300°C			
	type S thermocouple	0°C~1750°C			
	type R thermocouple	0°C~1750°C			
Temperature accuracy* (electrical signal)	type K thermocouple	±1.2°C (at -100°C~0°C); ±0.8°C (at 0°C~1350°C)			
	type J thermocouple	±1.0°C (at -100°C~0°C); ±0.7°C (at 0°C~1200°C)			
	type T thermocouple	±1.0°C (at -150°C~0°C); ±0.8°C (at 0°C~400°C)			
	type E thermocouple	±0.9°C (at -100°C~0°C); ±0.7°C (at 0°C~850°C)			
	type N thermocouple	±1.5°C (at -100°C~0°C); ±0.7°C (at 0°C~1300°C)			
	type S thermocouple	±4.5°C (at 0°C~100°C); ±3.0°C (at 100°C~300°C); ±2.2°C (at 300°C~1750°C)			
	type R thermocouple	±4.5°C (at 0°C~100°C); ±3.0°C (at 100°C~300°C); ±2.2°C (at 300°C~1750°C)			
	type B thermocouple	±5.5°C (at 600°C~800°C); ±3.8°C (at 800°C~1000°C); ±2.5°C (at 1000°C~1800°C)			
Temperature resolution		0.01°C			
Test speed		fast: 500ms slow: 1s			
Cold junction		accuracy: 0.5°C			
Interface		communication interface: RS232C/LAN			
		storage interface: USB (only U disk)			
Remote control		baud rate supports up to 115200bps, compatible with SCPI protocol and ASCII transmission			
Power supply		AC: 100V~240V, 50/60Hz AC/DC adapter: 24V/1A (optional)			
Operation environment		temperature: 10°C~40°C humidity: 10%RH~90%RH (non-condensing)			
Storage environment		temperature: 0°C~50°C humidity: 10%RH~90%RH (non-condensing)			
Dimension		370×260×100mm			

*Accuracy is specified for main unit in the ambient temperature between 15°C and 35°C, the above specification does not include thermocouple probe error

STANDARD DELIVERY

Main unit	1 pc
K-type thermocouple (0350-K01)	8/16/32/48 pcs
RS232 cable	1 pc
Software	1 pc

OPTIONAL ACCESSORY

AC/DC adapter	0350-ADAPTER
----------------------	---------------------

*Number of thermocouples corresponding to the number of channels

SPECIFICATION OF K-TYPE THERMOCOUPLE*

Code	Range	Accuracy	Length
0350-K01	-20°C~200°C	±1.5°C	2m

*Other models, temperature range and length of thermocouples can be customized