

DEPTH MICROMETERS




3240-100



- Graduation: 0.01mm
- Meet DIN863-2
- Micrometer head accuracy: +/-3μm
- Rod accuracy: +/-(2+L/75)μm,
  L is the measuring range in mm
- Rods with flat end
- Ratchet stop






Code	Range	Rods
3240-25	0-25mm	1 pc
3240-50	0-50mm	2 pcs
3240-75	0-75mm	3 pcs
3240-100	0-100mm	4 pcs
3240-150	0-150mm	6 pcs
3240-200	0-200mm	8 pcs
3240-300	0-300mm	12 pcs

DEPTH MICROMETERS




3241-150

- Graduation: 0.01mm
- Meet DIN863-2
- Micrometer head accuracy: +/-3μm
- Rod accuracy: +/-(2+L/75)μm,
  L is the measuring range in mm
- Rods with flat end
- Ratchet stop




Code	Range	Rods
3241-25	0-25mm	1 pc
3241-50	0-50mm	2 pcs
3241-75	0-75mm	3 pcs
3241-100	0-100mm	4 pcs
3241-150	0-150mm	6 pcs
3241-200	0-200mm	8 pcs
3241-300	0-300mm	12 pcs



HIGH PRECISION DIGITAL HEIGHT GAUGES

DATA OUTPUT

VIDEO




power supplied by charge pal




data transmitted to Excel without software; short press the foot switch to transmit data, long press to zero



1155-505



measuring tips (included)

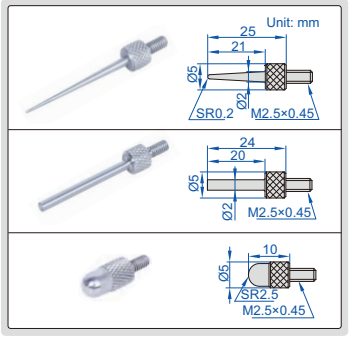

- Range: 0~50mm
- Measuring force: 0.8~1.2N
- Power supply: 5V/1A (adapter or charge pal)
- High stability, high precision, high response speed (5000mm/s)
- High brightness LED display
- Ceramic base flatness: 1μm

Code	Resolution	Accuracy (at 20°C)	Output
1155-505	0.5μm/0.00002" (can switch to: 1μm/0.00005")	1.5μm	USB
1155-510	0.1μm/0.000005" (can switch to: 1μm/0.00005")	1μm	USB

STANDARD DELIVERY

Main unit	1 pc

OPTIONAL ACCESSORY

Contact point	code 6282
Charge pal	1155-5-POB
Data output cable (including foot switch)	1155-5-FOS