

1348 DIGI-MET® Universal calipers

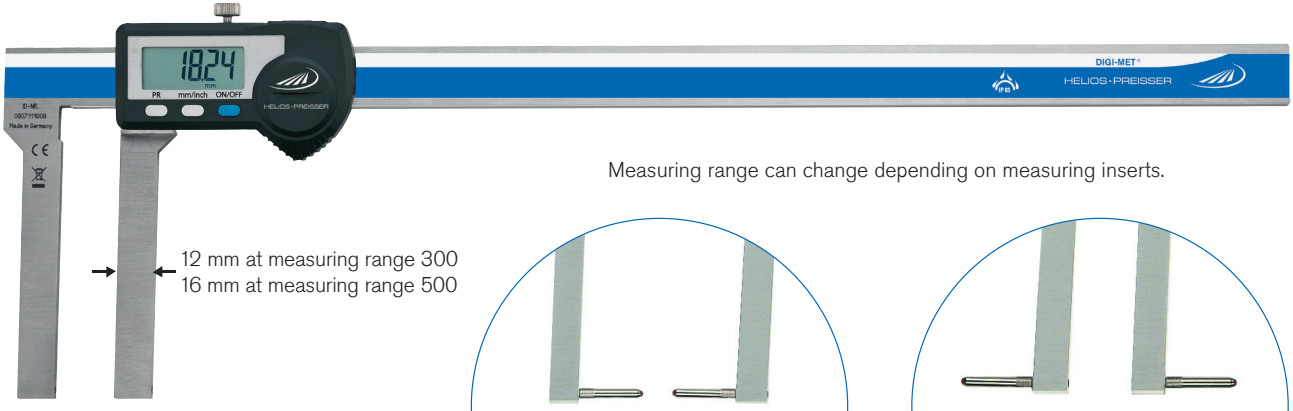


12 mm at measuring range 300
16 mm at measuring range 500

Measuring range can change depending on measuring inserts.

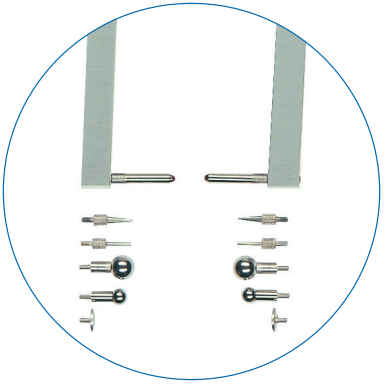

- for external measurements

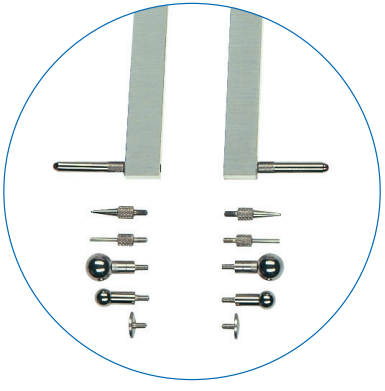

- for internal measurements

Specification

- Stainless steel
- Factory standard
- LCD display 8.5 or12.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on problematic measuring tasks through measuring inserts with thread M 2.5 (optional see pages 132 - 134)

Electronic functions

- ON/OFF switch
- **Q**uick**S**tart Electronic
- **Q**uick**L**ock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case
- Without measuring inserts (correct measuring inserts with thread M 2.5 see pages 132 - 134)

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		300	12	90	3.5	0.01	.0005	1348 722	
		500	20	100	4.0	0.01	.0005	1348 728	

Accessories	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	
Cable for USB, incl. software	1998 720	
Cable for RS 232	1997 501	
Cable for Digimatic	1998 501	