

Richtwaagen
ULTRA active
Winkelmodell



- ▶ DIN 877
- ▶ Rahmen aus Spezialguss
- ▶ Handwärmeschutz
- ▶ 4 Messflächen, 3 mit Prisma
- ▶ Längs- und Querlibelle
- ▶ Lieferung einzeln verpackt

◁ = Empfindlichkeit mm/m

1751 1.. :
Holzetui

! Richtwaagen für große Wellen-Ø oder
mit magnetischen Flächen auf Anfrage.

A mm	B mm	kg	◁ 0,3 №	◁ 0,1 №	◁ 0,04 №	◁ 0,02 №	◁ 0,01 №	№
100x100	27	0,8	1745 101	1746 101	1747 101	-	-	1751 101
150x150	35	2,0	1745 102	1746 102	1747 102	1748 102	1749 102	1751 102
200x200	40	3,8	1745 103	1746 103	1747 103	1748 103	1749 103	1751 103
300x300	55	7,9	1745 104	1746 104	1747 104	1748 104	1749 104	1751 104


Engineer's levels
ULTRA active
Square frame

- ▶ DIN 877
- ▶ Special cast-iron frame
- ▶ Insulated pads
- ▶ 4 measuring faces, 3 with V grooves
- ▶ Longitudinal and lateral vials
- ▶ Delivered in a case

◁ = Sensitivity mm/m

1751 1.. :
Wooden box

! Levels for large shaft-Ø or
with magnetic faces on request.

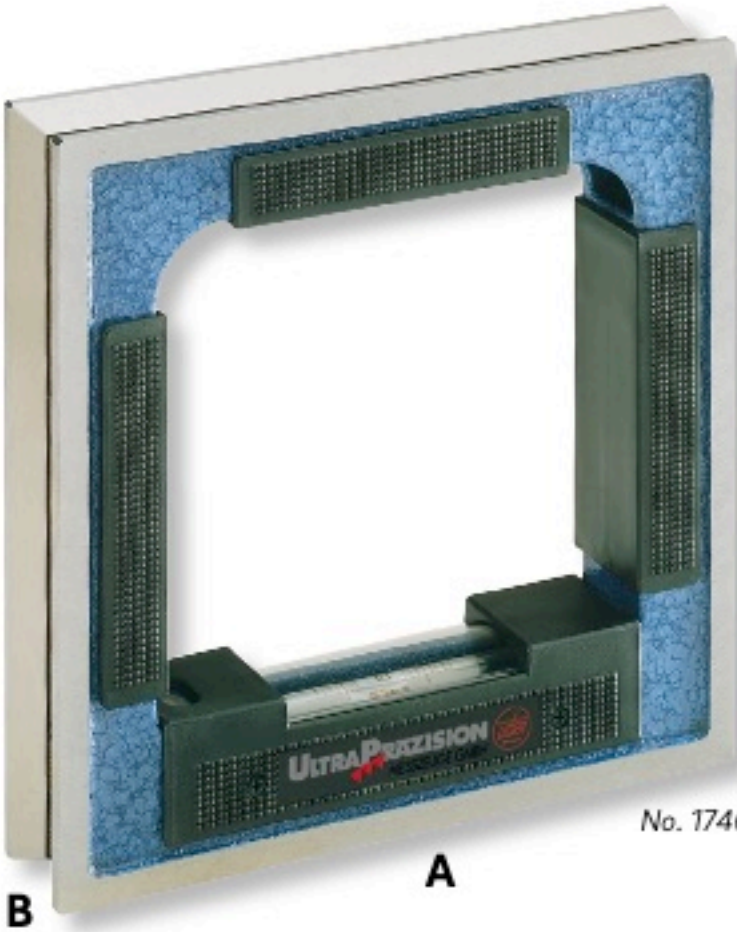

No. 1746 102



No. 1751 102