



BACK PLUNGER TYPE DIGITAL INDICATORS




INSPECTION CERTIFICATE DATA OUTPUT

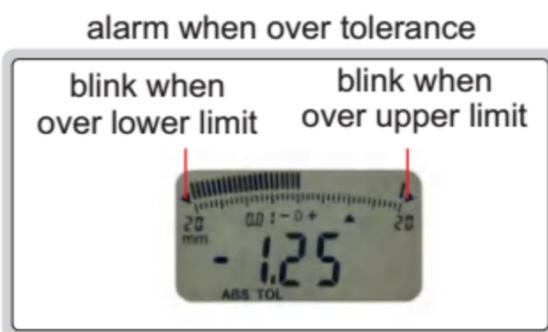

2118-10

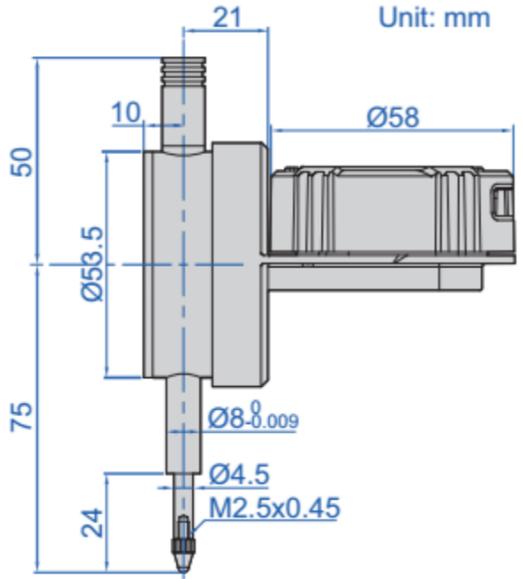

- Display can rotate 320°, and display direction is changeable
- Reading in digital and analog
- Button function: tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output
- Optional accessory: wireless transmitter code **7315-50M** (receiver is needed) page 6, bluetooth transmitter code **7214-50M** page 12, data output cable code **7302-40M** page 21, **7305-40M** page 17, backs (page 277~278), contact points (page 272~276)

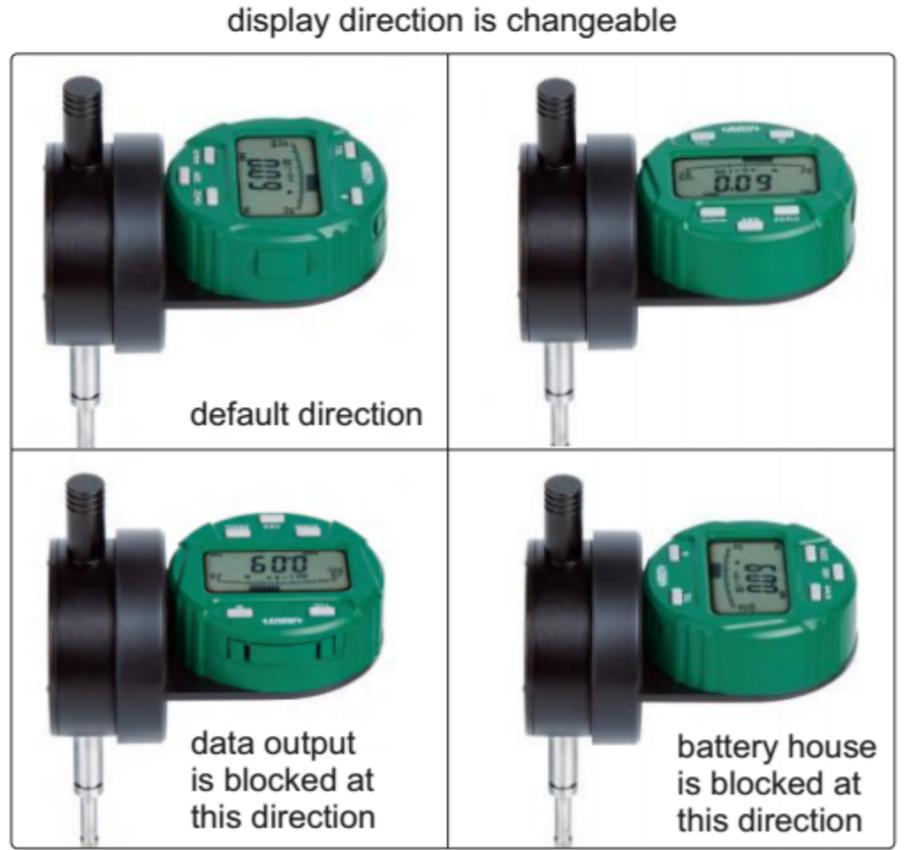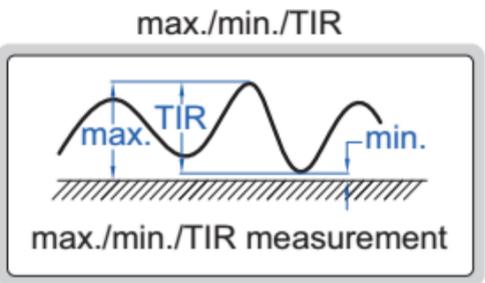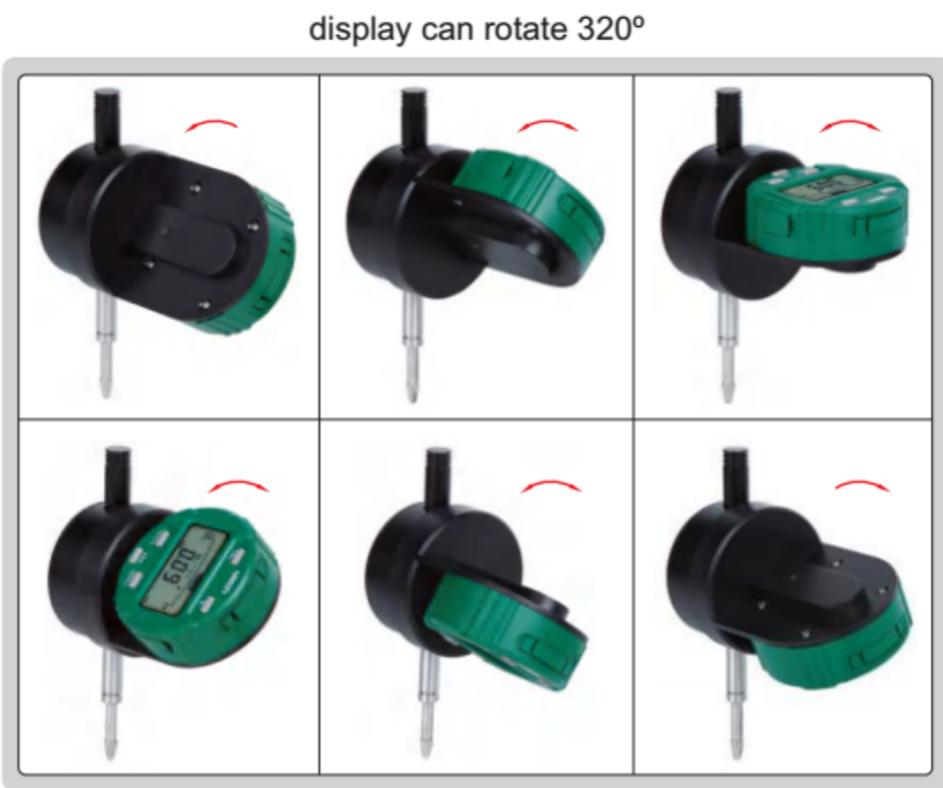

remark: to change above direction, 4 fixing screws on the back of display need to be removed first.

| Code | Range | Resolution | Accuracy | Hysteresis | Maximum measuring force | Cap | Remark |
|-------------------|-------------|------------------|----------|------------|-------------------------|----------|-----------|
| 2118-10 * | 12.7mm/0.5" | 0.01mm/0.0005" | 20µm | 10µm | 1.5N | can lift | flat back |
| 2118-101 * | 12.7mm/0.5" | 0.001mm/0.00005" | 5µm | 2µm | 1.5N | can lift | flat back |

* Supplied with manufacturer inspection certificate