


Design:

Magnet systems with galvanised metal jacket. The rear side has a metric female thread. Application temperature up to max. 80 °C. Length tolerance ± 0.2 mm

Use:

Round bar magnets are used for installation in steel and iron

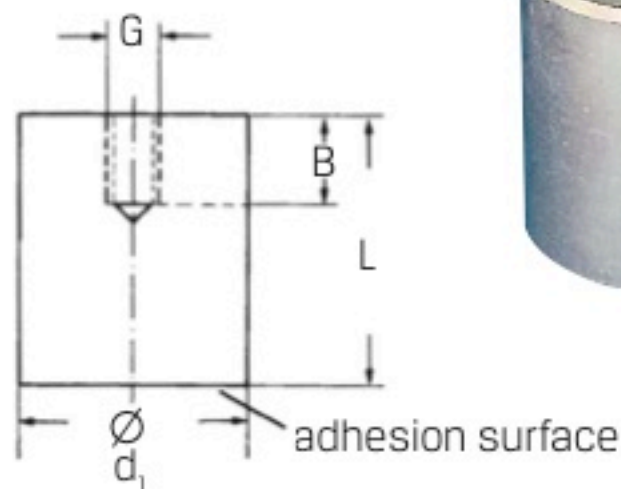

N° article	279620 Blind hole magnet	d_1 mm	L mm	B mm	Adhesion, min. N	G metric
8	●	8	12	3	12	M3
10	●	10	16	7	24	M4
13	●	13	18	3	60	M4
16	●	16	20	6	90	M4
20	●	20	25	9	135	M5
25	●	25	30	10	190	M6
35	●	35	40	10	300	M8
50	●	50	50	13	550	M12