


# BORE GAGES

ATTENTION: NOT SUITABLE  
FOR 0.001MM DIAL INDICATORS



- Optional accessory: setting ring (code **6312**), long handle (code **7351**), bore gage setter

| Range     | ØA   | B    | C    | ØD | E     | L   | L1   |
|-----------|------|------|------|----|-------|-----|------|
| 35-60mm   | 12.8 | 22   | 9    | 13 | 27    | 141 | 75   |
| 50-160mm  | 12.8 | 28.5 | 9.2  | 13 | 35    | 141 | 76.2 |
| 160-250mm | 14.5 | 62.0 | 12.7 | 15 | 74.5  | 391 | 100  |
| 250-450mm | 14.5 | 91.5 | 15.0 | 15 | 101.5 | 391 | 100  |

(mm)




## With dial indicator

| Code             | Range     | Indicator   | Accuracy | Repeatability |
|------------------|-----------|---|----------|---------------|
| <b>2827-60A</b>  | 35-60mm   | dial indicator, code <b>2308-10FA</b> , range 10mm, graduation 0.01mm | ±0.018mm | 0.003mm       |
| <b>2827-160A</b> | 50-160mm  |   | ±0.018mm | 0.003mm       |
| <b>2827-250A</b> | 160-250mm |   | ±0.018mm | 0.003mm       |
| <b>2827-450A</b> | 250-450mm |   | ±0.018mm | 0.003mm       |

## With digital indicator

| Code            | Range     | Indicator   | Accuracy | Repeatability |
|-----------------|-----------|---|----------|---------------|
| <b>2127-60</b>  | 35-60mm   | digital indicator, code <b>2108-10F</b> , range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to: 0.01mm/0.0005") | ±0.018mm | 0.003mm       |
| <b>2127-160</b> | 50-160mm  |   | ±0.018mm | 0.003mm       |
| <b>2127-250</b> | 160-250mm |   | ±0.018mm | 0.003mm       |
| <b>2127-450</b> | 250-450mm |   | ±0.018mm | 0.003mm       |

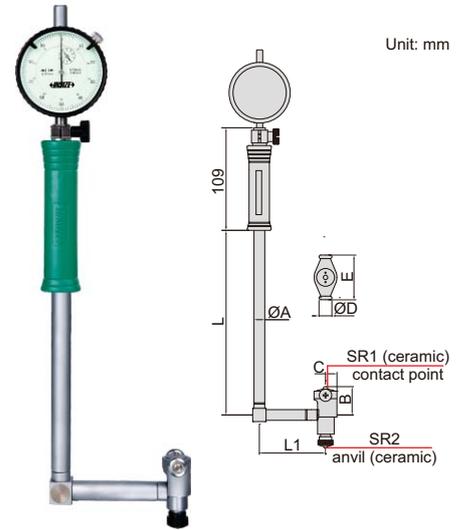

**2827-160A**

