DIGITAL TUBULAR INSIDE MICROMETERS WITH INTERCHANGEABLE POINTS

IP65 WATERPROOF


DATA OUTPUT

POINTS CAN BE CUSTOMIZED



- IP65 dust/waterproof
- Resolution: 0.001mm/0.00005"
- Accuracy: (3+n+L/50)μm
  n=number of rods
  L=maximum measuring length (mm)
- Button function: on/off, set, mm/inch, data transmission
- Data output
- Automatic power off
- Power:
  with data interface: CR2032
  built-in wireless: rechargeable lithium battery
- Optional accessory: gauge blocks (code **4101-B200**), gauge block holder (**6886** series), gauge block accessory (code **6881-C**)

Unit: mm

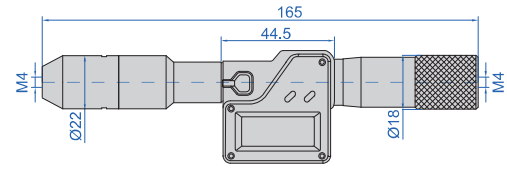

With data interface (optional wireless transmitter code 7315-31, receiver is needed page 8)

Code	Range *	Travel of micrometer head	Extension rods
3525-225	200-225mm	25mm	—
3525-1050	200-1050mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm, 400mm
3525-1550	200-1550mm	25mm	25mm, 50mm (2 pcs), 100mm (2 pcs), 200mm, 400mm (2 pcs)
3525-2050	200-2050mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm (2 pcs), 400mm (3 pcs)

*Range after installing ball points

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code
3525-□□□□WL

Code examples:

Original code	Wireless code
3525-225	**3525-225WL**
3525-1050	**3525-1050WL**

Screw thread points (optional) **


Internal thread (60° thread angle)

Code	Pitch
7321-T11	0.4-0.5mm/64-48TPI
7321-T12	0.6-0.9mm/44-28TPI
7321-T13	1-1.75mm/24-14TPI
7321-T14	2-3mm/13-9TPI
7321-T15	3.5-5mm/8-5TPI
7321-T16	5.5-7mm/4.5-3.5TPI
7321-T1S	6 pairs/set, including all above points



7321-T16


Unit: mm



Point sleeve (optional)

Code
3526-T101

Unit: mm



** Point sleeve(code **3526-T101**) is needed


Ball points (optional) **

- Supplied in pair
- Made of carbide

Unit: mm

Code	SØD
3525-S7	7mm
3525-S8	8mm
3525-S9	9mm
3525-S10	10mm

Code	SØD
3525-S11	11mm
3525-S12	12mm
3525-S13	13mm
3525-S14	14mm
3525-S15	15mm



** Points can be customized according to customers' requirements