

INDUSTRIAL ELECTRONIC BALANCES

DATA
OUTPUT

- Zero-setting, weighing, counting, checking alarm
- Subtracting tare value, accumulation, percentage display
- Overload alarm
- LCD display, with backlight
- Automatic power off
- Data output
- Unit: kg, lb, g, oz, t(ola)



8307-15K



alarm light (optional)




printer (optional)

SPECIFICATION

Operation temperature	-10~40°C
Operation humidity	30% ~80%RH
Dimension of pan	300×225mm
Power	rechargeable lead acid battery (6V/4Ah)
Output	RS232

Unit: mm

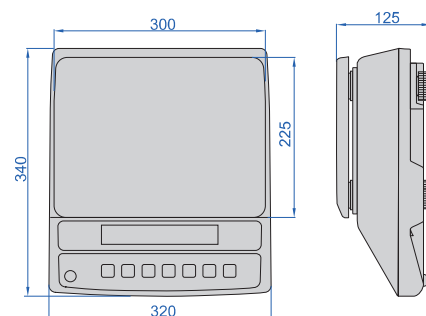

Code	Maximum weighing	Resolution (d)	Minimum weighing	Verification interval (e)	Number of verification interval (n)	Accuracy (m is load)
8307-15K	15kg	0.1g	5g	1g	15000	$m \leq 5\text{kg}: \pm 0.5\text{g}; m > 5\text{kg}: \pm 1\text{g}$
8307-30K	30kg	0.2g	10g	1g	30000	$m \leq 5\text{kg}: \pm 0.5\text{g}; 5\text{kg} < m \leq 20\text{kg}: \pm 1\text{g}; m > 20\text{kg}: \pm 1.5\text{g}$
8307-6KA	6kg	0.1g	5g	1g	6000	$m \leq 5\text{kg}: \pm 0.5\text{g}; m > 5\text{kg}: \pm 1\text{g}$
8307-15KA	15kg	0.2g	10g	1g	15000	$m \leq 5\text{kg}: \pm 0.5\text{g}; m > 5\text{kg}: \pm 1\text{g}$
8307-3KB	3kg	0.1g	2g	1g	3000	$m \leq 500\text{g}: \pm 0.5\text{g}; 500\text{g} < m \leq 2\text{kg}: \pm 1\text{g}; m > 2\text{kg}: \pm 1.5\text{g}$
8307-6KB	6kg	0.2g	10g	1g	6000	$m \leq 5\text{kg}: \pm 0.5\text{g}; m > 5\text{kg}: \pm 1\text{g}$
8307-30KB	30kg	1g	20g	10g	3000	$m \leq 5\text{kg}: \pm 5\text{g}; 5\text{kg} < m \leq 20\text{kg}: \pm 10\text{g}; m > 20\text{kg}: \pm 15\text{g}$

OPTIONAL ACCESSORY

Alarm light	8001-ALARM
Printer	8001-PRINTER
Data output cable (keyboard format)	7302-8001 page 14
Wireless transmitter (need receiver)	7315-8001 page 6