



Machine type: Conventional and CNC – suitable for:
 • Lathe machines and automatic short-turning lathes

Application: Cut knurling (swarf removal)

Knurling profile on work piece
DIN 82: RGE30°



Knurling wheels: 2xAA



RGE45°



1xBL15°/1xBR15°

Tool direction: • Feed knurling

Product features:

- Modular system: universal knurling tool for both left-/ and right and orientation. Easy tool conversion
- Flexible use: Vertical height adjustment for shank 20 and 25
- Setting of the centre height for shank 25 through vertical height adjustment of the tool head
- Setting scale for fast setting of the work piece diameter

Tool holder No.	Working area Ø mm	a mm	b mm	c mm	d mm	e mm	f mm	Knurling wheels (Ø x width x bore) mm	Spare Part
941-20/25M250608-A.1	10-250	20	20	134	68	54	58	25x6x8	21BHR0506

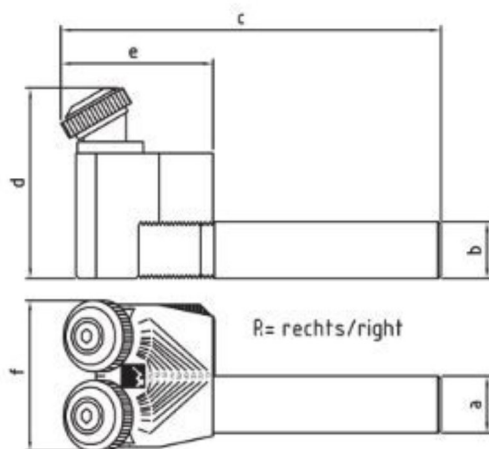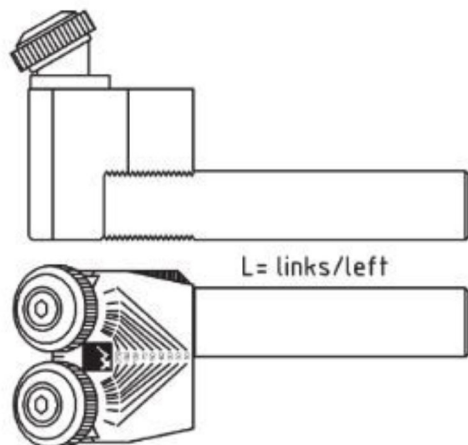

21BHR0506