


HYDRAULIC CHUCK (Standard)

HC

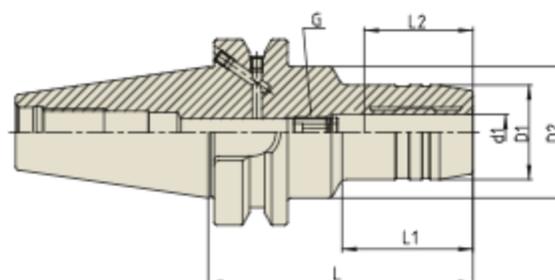

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
40	BT40AD/B-HC6-90	P2554003	6	26	44.5	90	43	27	M5x0.8	1.30
	BT40AD/B-HC8-90	P2554021	8	28	44.5	90	44.5	27	M6x1.0	1.30
	BT40AD/B-HC10-90	P2554005	10	30	44.5	90	44.5	32	M8x1.0	1.35
	BT40AD/B-HC12-90	P2554002	12	32	44.5	90	44.5	37	M10x1.0	1.35
	BT40AD/B-HC16-90	P2554006	16	38	44.5	90	47.5	42	M12x1.0	1.40
	BT40AD/B-HC20-90	P2554007	20	42	44.5	90	47.5	42	M16x1.0	1.50
	BT40AD/B-HC25-100	P2770641	25	50	60	100	47.5	48	M16x1.0	1.70
	BT40AD/B-HC32-105	P2770612	32	60	-	105	-	55	M16x1.0	2.10

- ▶ For applicable hydraulic chuck collet, please refer to page 80-82.
- ▶ Balancing grade G2.5 at 25,000 RPM or U max <1 gmm.
- ▶ Supplied with clamping T-wrench.