


# SHRINK FIT HOLDER (Extra Slim)

**SFHS**

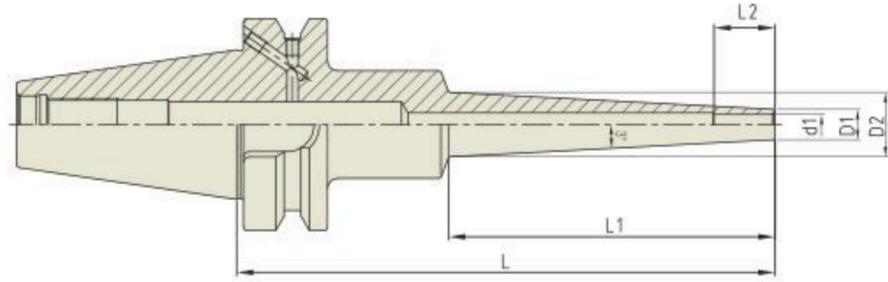

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
40	BT40AD/B-SFHS3-95	P2779860S	3	6	25	95	42	9	-
	BT40AD/B-SFHS3-120	P2779861S	3	6	25	120	67	9	-
	BT40AD/B-SFHS4-95	P2779863S	4	7	25	95	42	12	-
	BT40AD/B-SFHS4-120	P2779864S	4	7	25	120	67	12	-
	BT40AD/B-SFHS6-95	P2779866S	6	9	25	95	42	18	-
	BT40AD/B-SFHS6-120	P2779867S	6	9	25	120	67	18	-
	BT40AD/B-SFHS6-160	P2779868S	6	9	32	160	97	18	-
	BT40AD/B-SFHS8-95	P2779869S	8	11	25	95	42	24	-
	BT40AD/B-SFHS8-120	P2779870S	8	11	32	120	67	24	-
	BT40AD/B-SFHS8-160	P2779871S	8	11	32	160	97	24	-
	BT40AD/B-SFHS10-95	P2779872S	10	13	25	95	42	30	-
	BT40AD/B-SFHS10-120	P2779873S	10	13	32	120	67	30	-
	BT40AD/B-SFHS12-95	P2779875S	12	15	32	95	42	30	-
	BT40AD/B-SFHS12-120	P2779876S	12	15	32	120	67	30	-

▶ Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.

SK  
(DIN 69871)

CBT  
(BT DUAL CONTACT)

BT  
(JIS B6339/MMS 403)

HSK  
(DIN 69893/ISO 12164)

STRAIGHTTYPE & SET

ACCESSORY & PARTS