





# 1188


# HSS DIN 333 A



P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 30-40	● 12-16					● 30-35	○ 20-30		● 20-30	● 35-40		○ 10-15					

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

**NEW**

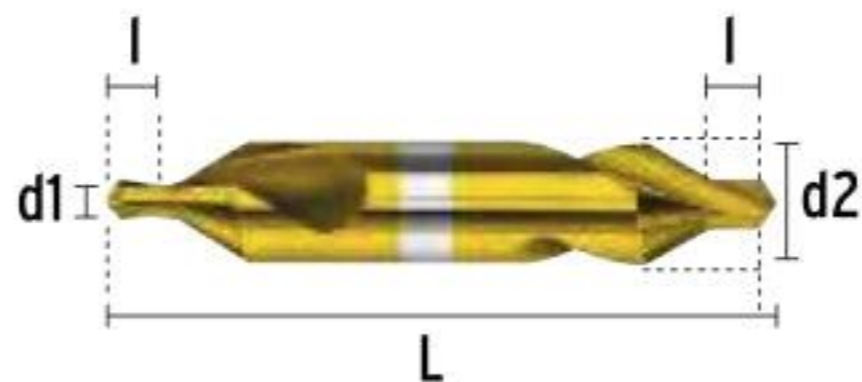

d1 mm	d2 mm
1,00	3,15
1,25	3,15
1,60	4,00
2,00	5,00
2,50	6,30
3,15	8,00

L mm	l mm	
31,50	1,60	1
33,50	1,90	1
37,50	2,40	1
42,00	2,90	1
47,00	3,60	1
52,00	4,40	1

d1 mm	d2 mm
4,00	10,00
5,00	12,50
6,30	16,00
10,00	25,00
12,00	31,50

L mm	l mm	
59,00	5,60	1
66,00	6,90	1
74,00	8,60	1
100,00	31,50	1
125,00	33,50	1