


# HSS DIN338N



P				M		K			N				S		H		
>800	>1.000	>1.200	>1.400	>950	>1.200	>500	>800	>1.400	Al	Cu	Mg/Zn	Plastic	Ti	Ni	50 HRC	55 HRC	60 HRC
● 15-35						● 25-30	● 12-16		○ 50-60	● 30-60		○ 20-25					

Vc (m/mm) ● Best ○ Alternative

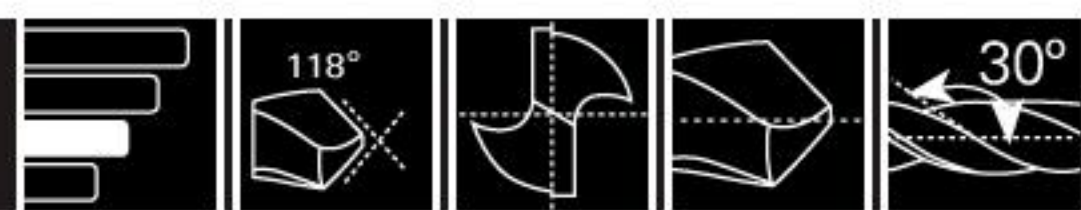

## Technical Features:

- High Speed Steel HSS
- Short series
- Tip of 118°
- Helix at 30°

## Applications:

Soft magnetic steels, construction and cementation steels, and non-alloy and alloy carbon steels up to a strength of 800N / mm<sup>2</sup>

[BUY PRODUCT](#)