


1104

HSS DIN 338 N MR

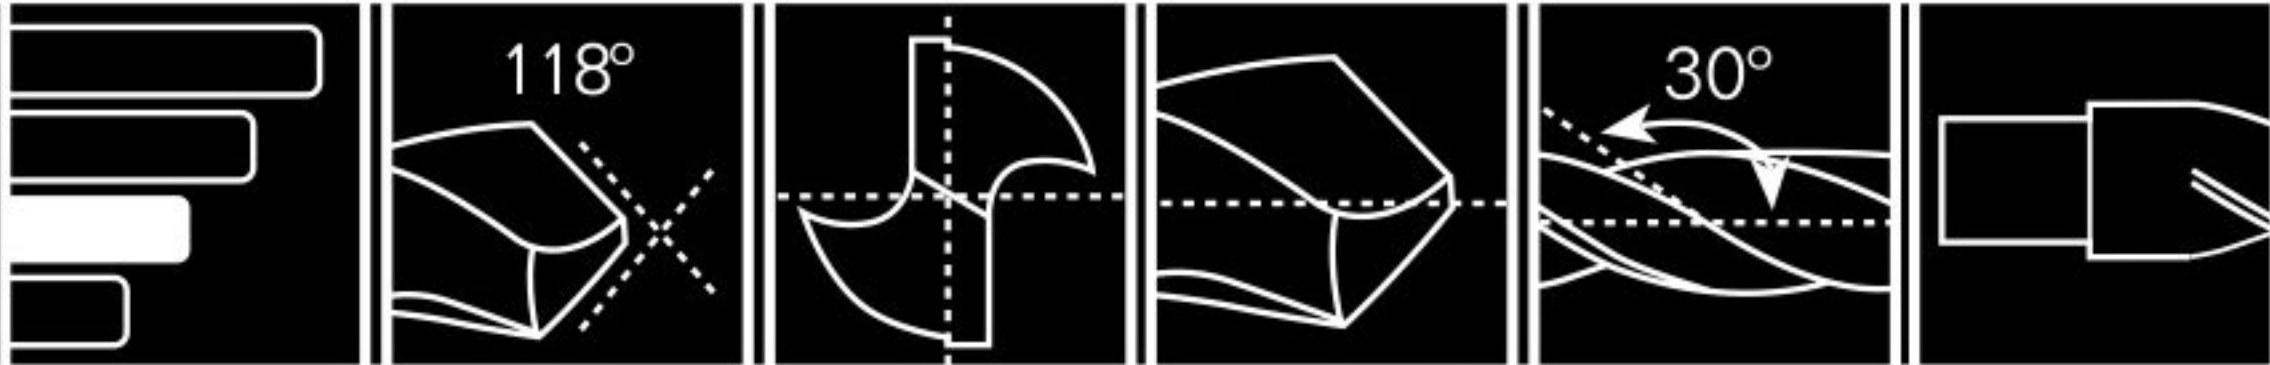

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 15-35						● 25-30	● 12-16		○ 50-60	● 30-60		○ 20-25					
Avance/feed	Ø2	0,02-0,06				0,04-0,06	0,04-0,06		0,02-0,05	0,02-0,05		0,03-0,04					
	Ø5	0,08-0,12				0,08-0,12	0,05-0,12		0,05-0,12	0,05-0,1		0,06-0,07					
	Ø10	0,12-0,30				0,20-0,30	0,18-0,30		0,18-0,24	0,18-0,24		0,12-0,13					
	Ø15	0,18-0,40				0,30-0,40	0,20-0,40		0,20-0,32	0,2-0,32		0,16-0,17					
	Ø20	0,22-0,46				0,35-0,46	0,25-0,46		0,25-0,37	0,25-0,37		0,25-0,26					

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative



➤	Ø mm	d mm	L mm	l mm		➤	Ø mm	d mm	L mm	l mm	
	10,00	8	133	87	1		18,50	12	198	135	1
	10,50	8	133	87	1		18,60	12	198	135	1
	11,00	8	142	94	1		18,75	12	198	135	1
	11,50	8	142	94	1		19,00	12	198	135	1
	12,00	8	151	101	1		19,25	12	205	140	1
	12,50	8	151	101	1		19,50	12	205	140	1
	13,00	10	151	101	1		19,75	12	205	149	1
	13,25	10	160	108	1		20,00	13	205	140	1
	13,50	10	160	108	1		20,50	13	212	145	1
	13,75	10	160	108	1		20,60	13	212	145	1
	14,00	10	160	108	1		21,00	13	212	145	1
	14,25	10	169	114	1		21,50	13	219	150	1
	14,40	10	169	114	1		22,00	13	219	150	1
	14,50	10	169	114	1		22,50	13	226	155	1
	14,75	10	169	114	1		22,60	13	226	155	1
	15,00	10	169	114	1		23,00	13	226	155	1
	15,25	10	178	120	1		23,50	13	226	155	1
	15,50	10	178	120	1		24,00	13	233	160	1
	15,75	10	178	120	1		24,50	13	233	160	1
	16,00	12	178	120	1		25,00	13	233	160	1
	16,25	12	184	125	1		25,50	13	240	165	1
	16,40	12	184	125	1		26,00	13	240	165	1
	16,50	12	184	125	1		26,50	13	240	165	1
	16,75	12	184	125	1		27,00	13	247	170	1
	17,00	12	184	125	1		27,50	13	247	170	1
	17,25	12	191	130	1		28,00	13	247	170	1
	17,50	12	191	130	1		28,50	13	254	175	1
	17,75	12	191	130	1		29,00	13	254	175	1
	18,00	12	191	130	1		29,50	13	254	175	1
	18,25	12	198	135	1		30,00	13	254	175	1