




P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
●						●	●		○	●		○					
15-35						25-30	12-16		50-60	30-60		20-25					

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

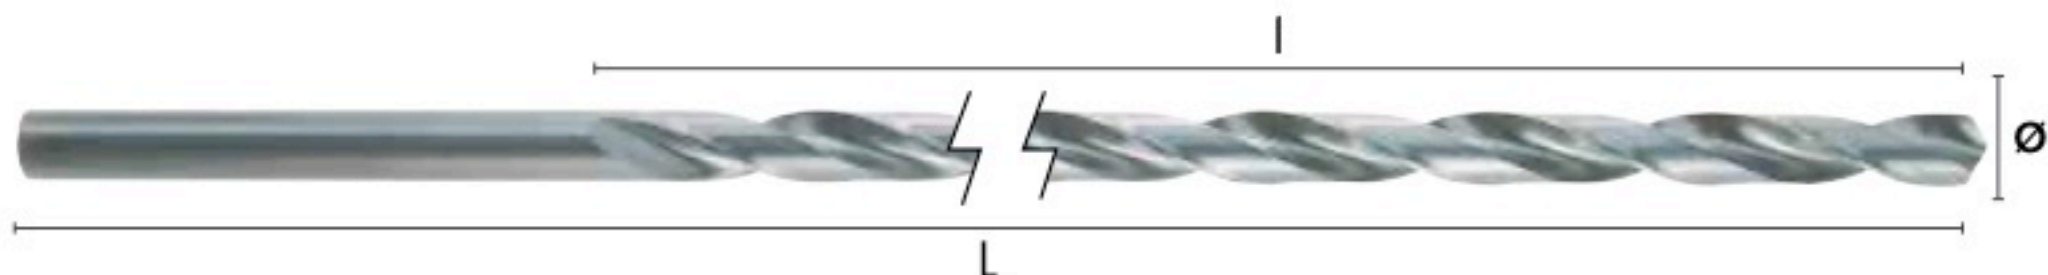

Ø mm	L mm	l mm	Icon	Ø mm	L mm	l mm	Icon
2,00	125	85	1	8,00	305	210	1
2,50	140	95	1	8,00	390	265	1
3,00	150	100	1	8,50	240	165	1
3,00	190	130	1	8,50	305	210	1
3,50	165	115	1	8,50	390	265	1
3,50	210	145	1	9,00	250	175	1
3,50	265	180	1	9,00	320	220	1
4,00	175	120	1	9,00	410	280	1
4,00	220	150	1	9,50	250	175	1
4,00	280	190	1	9,50	320	220	1
4,50	185	125	1	9,50	410	280	1
4,50	235	160	1	10,00	265	185	1
4,50	295	200	1	10,00	340	235	1
5,00	195	135	1	10,00	430	295	1
5,00	245	170	1	10,50	265	145	1
5,00	315	210	1	10,50	340	250	1
5,50	205	140	1	10,50	430	295	1
5,50	260	180	1	11,00	280	195	1
5,50	330	235	1	11,00	365	250	1
6,00	205	140	1	11,00	455	310	1
6,00	260	180	1	11,50	280	195	1
6,00	330	225	1	11,50	365	250	1
6,50	215	150	1	11,50	455	310	1
6,50	275	190	1	12,00	295	205	1
6,50	350	235	1	12,00	375	260	1
7,00	225	155	1	12,00	480	315	1
7,00	290	210	1	12,50	295	205	1
7,00	370	250	1	12,50	375	260	1
7,50	225	155	1	12,50	480	315	1
7,50	290	200	1	13,00	295	205	1
7,50	370	250	1	13,00	375	260	1
8,00	240	165	1	13,00	480	315	1