

适用范围: CNC加工中心。


特征:

- 1. 具有高精度, 高夹紧, 高可靠性和稳定性。
- 2. 易损部件淬火处理。
- 3. 具有自紧功能, 轻轻夹紧钻头即可, 在钻孔中随着扭矩的增加而同步增加夹持力, 并能产生明显的高强度夹持力, 从而防止钻头打滑。

Application: Recommended for CNC machining center.

Features:

- 1. High precision, and high gripping force, high reliability and stability.
- 2. Flimsy parts are shaped by quenching.
- 3. Self-tightening feature automatically increase gripping force proportional to increase torque to prevent tool shank slippage.

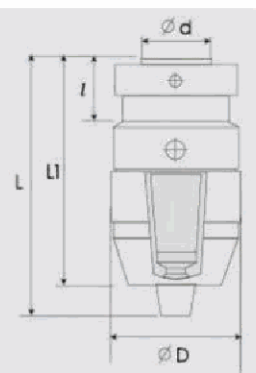

J01、02 SERIES MORSE、JACQUARD SHORT TAPER STOCK

J 0 1、0 2系列 莫氏、贾格短锥连接

工厂编号 Art.No	型 号 Model	夹持范围 Capacity mm	铰孔号 Tapering Hole Number	锥角 Taper	d mm	l mm	D mm	L mm	L1 mm	Kg	检查棒 Check rod		精度 Precision	报价 Unit Price
											大棒 mm Big rod	小棒 mm Small rod		
730002	J0104H	0.3-4 1/16" -5/32"	JT0	2° 48' 24.7"	6.350	11.112	29	60.8	55	-	4 x 45	-	0.05	
701002	J0106H	0.5-6	B10	2° 51' 26.7"	10.094	14.500	34	71.2	64	0.32	6 x 65	-	0.05	
720102	J0106H	1/16" -1/4"	JT1	4° 24' 53.1"	9.754	16.669	36	75.5	68	0.32	8 x 80	-	0.05	
713102	J0108H	0.5-8	B12	2° 51' 26.7"	12.085	18.500	44	94.5	84.5	0.96	13 x 105	6 x 65	0.05	
732202	J0108H	1/16" -5/16"	JT2	4° 40' 11.6"	14.199	22.225	51	112	101	1.24	16 x 110	8 x 80	0.05	
707102	J0110H	1-10	B12	2° 51' 26.7"	12.085	18.500	57	129.2	116	1.70	20 x 120	10 x 95	0.05	
722202	J0110H	1/32" -3/8"	JT2	4° 40' 11.6"	14.199	22.225	51	112	101	1.24	16 x 110	8 x 80	0.05	
705202	J0113H	1-13	B16	2° 51' 41.0"	15.733	24.000	57	129.2	116	1.70	20 x 120	10 x 95	0.05	
724102	J0113H	1/32" -1/2"	JT33	3° 38' 13.4"	15.850	25.400	57	129.2	116	1.70	20 x 120	10 x 95	0.05	
707302	J0116H	1-16	B18	2° 51' 41.0"	17.780	32.000	57	129.2	116	1.70	20 x 120	10 x 95	0.05	
726702	J0116H	1/32" -5/8"	JT6	2° 58' 24.8"	17.170	25.400	57	129.2	116	1.70	20 x 120	10 x 95	0.05	
709402	J0120H	5-20	B22	2° 52' 31.5"	21.793	40.500	57	129.2	116	1.70	20 x 120	10 x 95	0.05	
728302	J0120H	3/16" -3/4"	JT3	3° 3' 3"	20.599	30.956	57	129.2	116	1.70	20 x 120	10 x 95	0.05	