


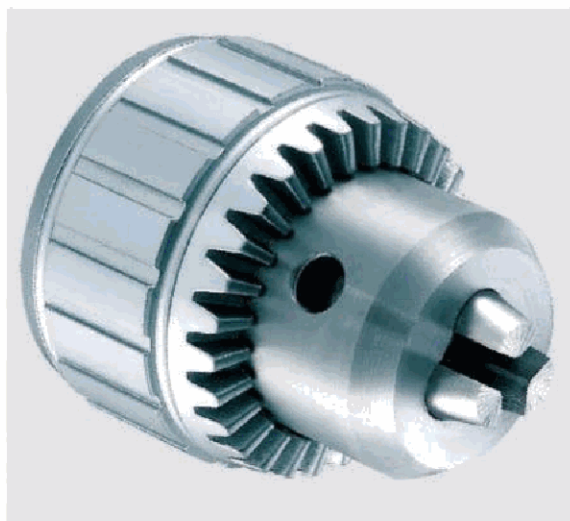

适用范围：轻型、中型、重型便携式台钻或基钻连接电动工具。

特征：


- 1. 高精度螺纹和圆锥孔紧密地连接在工具上。
- 2. 外壳，锁孔，钥匙经过淬火。
- 3. 夹爪特殊处理，具有良好耐磨性。
- 4. 外壳齿轮和钥匙齿轮冷压成型。
- 5. 精度准确可靠，持久耐用。

Application: Recommended for Light, Medium and Heavy-Duty portable bench or floor mounted power tools.

Features:

- 1. High precision threaded and tapered tightly mounts on the tools.
- 2. Sleeve, key hole and key are shaped by quenching.
- 3. Jaws are specifically engineered for tight tolerance production drilling.
- 4. Sleeve teeth and key holes are shaped by cold pressing.
- 5. Super precision and durable.

三爪镶钨钢(在型号后加W为镶钨钢)
carbide jaws (the models followed with W means carbide)

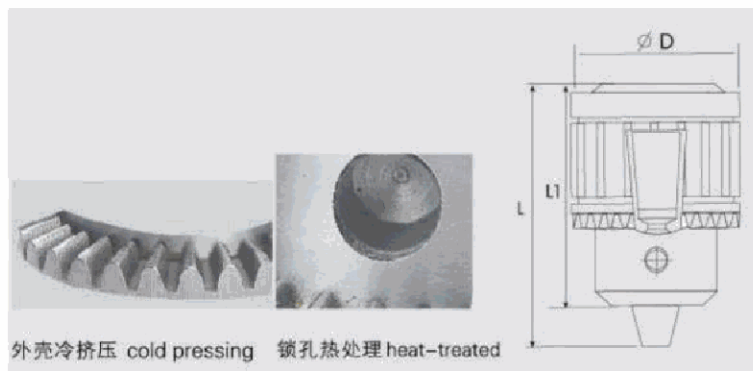

外壳冷挤压 cold pressing 锁孔热处理 heat-treated

MORSE TAPER MOUNT

工厂编号 Art.No	型号 Model	夹持范围 mm	Capacity Inch	连接尺寸 Mount	D mm	L1 mm	L mm	精度 Precision
442000	J2106W	0.6-6.5	1/64-1/4	B10	33.5	41.7	50	0.18
443100	J2110W	0.5-10	1/64-3/8	B12	45.5	53	69	0.18
444200	J2113W	0.5-13	1/64-1/2	B16	57	69.5	87	0.18
446300	J2116W	1.0-16	1/32-5/8	B18	58	77.5	95	0.18
447400	J2120W	5.0-20	3/16-3/4	B22	76	99.5	127	0.18
449500	J2125W	5.0-25	3/16-1	B24	93	112	146	0.18

MORSE TAPER MOUNT

工厂编号 Art.No	型号 Model	夹持范围 mm	Capacity Inch	连接尺寸 Mount	D mm	L1 mm	L mm	精度 Precision
482100	J2206W	0.6-6	1/64-1/4	JT1	33.5	41.7	50	0.18
483200	J2210W	0.5-10	1/64-3/8	JT2	44.5	53	69	0.18
484400	J2213W	0.5-13	1/64-1/2	JT33	57	69.5	87	0.18
484700	J2213W	0.5-13	1/64-1/2	JT6	57	69.5	87	0.18
486300	J2216W	1.0-16	1/32-5/8	JT3	58	77.5	95	0.18
487500	J2120W	5.0-20	3/16-3/4	JT4	76	99.5	127	0.18
489600	J2225W	5.0-25	3/16-1	JT5	93	112	146	0.18