



CARBIDE, 2 FLUTE 45° HELIX SHORT LENGTH

● VOLLHARTMETALL, 2 SCHNEIDEN 45° RECHTSSPIRALE KURZ

Ⓜ Fraise carbure, 2 dents, hélice 45°, courte

Ⓜ 2 TAGLIENTI, ELICA 45°, SERIE CORTA

- Suitable for high speed machining in aluminum and other non-ferrous materials
- Mirror surface - Excellent surface finish
- Superior chip evacuation

- Zur HSC- Bearbeitung von Aluminium und anderen Nichteisenmetallen.
- Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- Überlegene Spanabfuhr



CARBIDE 2 45° PLAIN UNCOATED p.C472



Recommended ToolHolder	Flat Shank		Plain Shank	
	Page	Page	Page	Page
Ⓜ END MILL HOLDER	D118-137	-	HYDRAULIC CHUCK	D15-46
Ⓜ	-	-	SHRINK FIT HOLDER	D47-72
Ⓜ	-	-	POWER MILLING CHUCK	D161-176
Ⓜ	-	-	ER COLLET CHUCK	D73-116

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
E5E48030	3.0	6	5	50
E5E48040	4.0	6	8	54
E5E48050	5.0	6	9	54
E5E48060	6.0	6	10	54
E5E48080	8.0	8	12	58
E5E48100	10.0	10	14	66
E5E48120	12.0	12	16	73
E5E48140	14.0	14	18	75
E5E48160	16.0	16	22	82
E5E48180	18.0	18	24	84
E5E48200	20.0	20	26	92

► TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

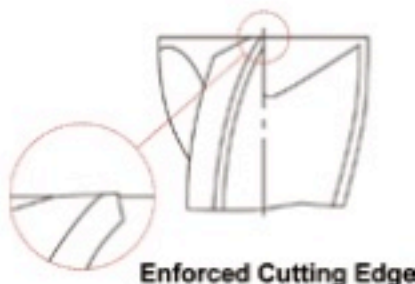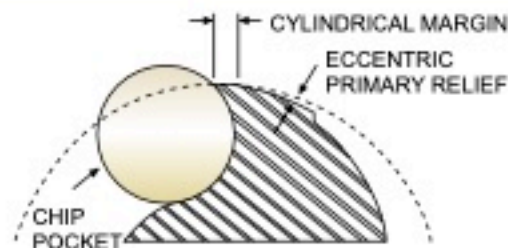

Enforced Cutting Edge