



ONLY ONE
COATED PM60 END MILLS

PLAIN SHANK

GYG72 SERIES

FLAT SHANK


GYF99 SERIES

PM60, 2 FLUTE SHORT LENGTH


PM60, 2 Schneiden, kurz, Zentrumschnitt

Revêtuë YG-AlCrN - PM60, 2 dents, série courte (Coupe au centre)

Rivestita PM60, 2 TAGLIENTI SERIE CORTA (Tagliante al centro)



up to \varnothing 3mm over \varnothing 3mm

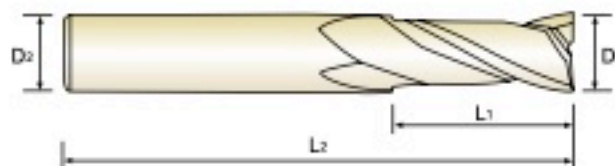

| Flat Shank | Page | Plain Shank | Page |
|---------------|----------|-------------------|----------|
| ENDMILLHOLDER | D118-137 | POWERMILLINGCHUCK | D161-176 |
| - | - | ERCOLLET CHUCK | D73-116 |
| - | - | SKSLIM CHUCK | D183-201 |

Unit : mm

| EDP No. | | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|----------|---------------|----------------|---------------|----------------|
| PLAIN | FLAT | D1 | D2 | L1 | L2 |
| GYG72010 | GYF99010 | 1.0 | 6 | 2.5 | 47 |
| GYG72020 | GYF99020 | 2.0 | 6 | 4 | 48 |
| GYG72030 | GYF99030 | 3.0 | 6 | 5 | 49 |
| GYG72040 | GYF99040 | 4.0 | 6 | 7 | 51 |
| GYG72050 | GYF99050 | 5.0 | 6 | 8 | 52 |
| GYG72060 | GYF99060 | 6.0 | 6 | 8 | 52 |
| GYG72070 | GYF99070 | 7.0 | 8 | 10 | 60 |
| GYG72080 | GYF99080 | 8.0 | 8 | 11 | 61 |
| GYG72090 | GYF99090 | 9.0 | 10 | 11 | 61 |
| GYG72100 | GYF99100 | 10.0 | 10 | 13 | 63 |
| GYG72120 | GYF99120 | 12.0 | 12 | 16 | 73 |
| GYG72140 | GYF99140 | 14.0 | 12 | 16 | 73 |
| GYG72160 | GYF99160 | 16.0 | 16 | 19 | 79 |
| GYG72180 | GYF99180 | 18.0 | 16 | 19 | 79 |
| GYG72200 | GYF99200 | 20.0 | 20 | 22 | 88 |
| GYG72220 | GYF99220 | 22.0 | 20 | 22 | 88 |
| GYG72250 | GYF99250 | 25.0 | 25 | 26 | 102 |

Mill Dia.
Tolerance (mm)

0 ~ - 0.03

Shank Dia.
Tolerance

h6