# DIAL TENSION GAGES

- Clockwise and counter-clockwise use
- For electronic and precision mechanical industry, such as test the contact pressure of relay, adjust the tension or compression of spring

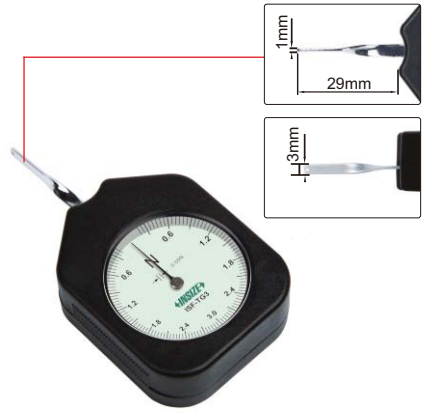


ISF-TG3

**SPECIFICATION (Unit: N)**

| Code | ISF-TGD1 | ISF-TGD3 | ISF-TGD5 | ISF-TG1 | ISF-TG1D5 | ISF-TG3 | ISF-TG5 |
|---|---|---|---|---|---|---|---|
| Range (N) | 0.01~0.1 | 0.03~0.3 | 0.05~0.5 | 0.1~1 | 0.15~1.5 | 0.3~3 | 0.5~5 |
| Graduation (N) | 0.002 | 0.005 | 0.01 | 0.02 | 0.025 | 0.05 | 0.1 |
| Accuracy | ±2% (full scale) | | | | | | |
| Dimension (L×W×H) | 90×47×19mm | | | | | | |
| Weight | 60g | | | | | | |

**SPECIFICATION (Unit: gf)**

| Code | ISF-TG10 | ISF-TG30 | ISF-TG50 | ISF-TG100 | ISF-TG150 | ISF-TG300 | ISF-TG500 |
|---|---|---|---|---|---|---|---|
| Range (gf) | 1~10 | 3~30 | 5~50 | 10~100 | 15~150 | 30~300 | 50~500 |
| Graduation (gf) | 0.2 | 0.5 | 1 | 2 | 2.5 | 5 | 10 |
| Accuracy | ±2% (full scale) | | | | | | |
| Dimension (L×W×H) | 90×47×19mm | | | | | | |
| Weight | 60g | | | | | | |