


VIDEOSCOPIES (ADVANCED TYPE)

REAR FIBER ILLUMINATION




replaceable lens cable

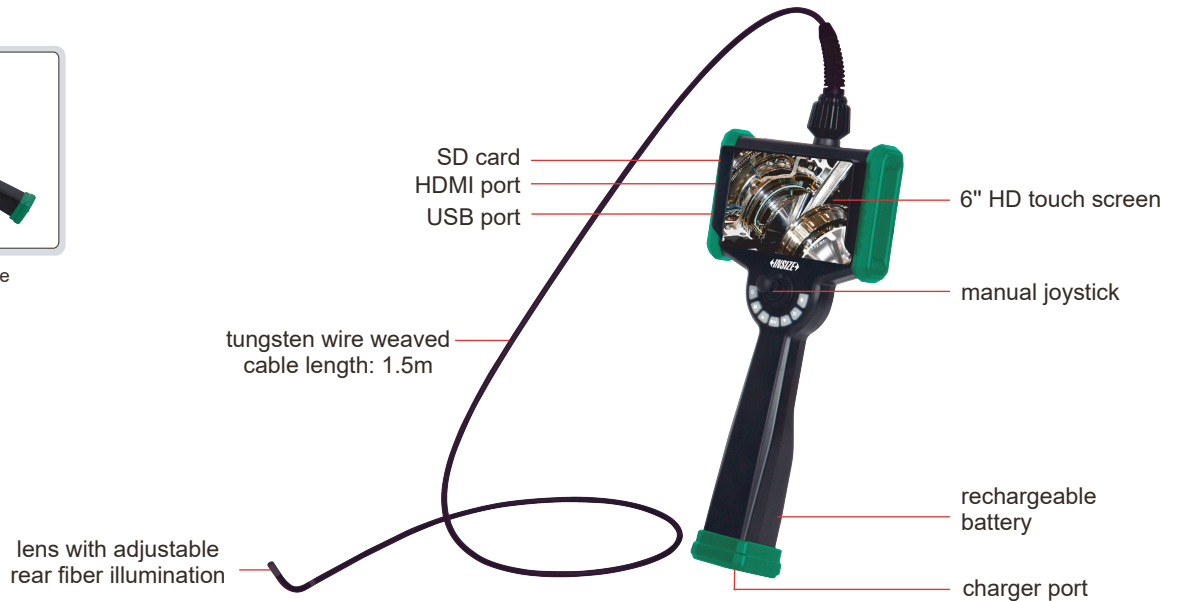

ISV-D6015




WIFI real-time image transmission

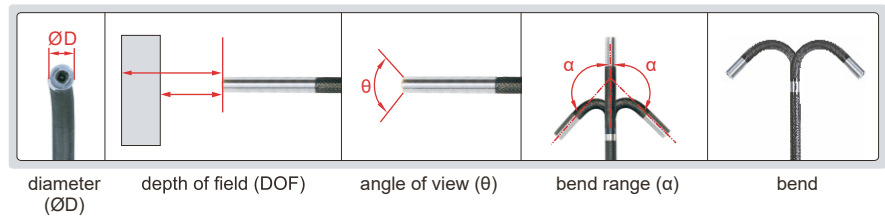

26

SPECIFICATION

Code	ISV-D09510	ISV-D1810	ISV-D2410	ISV-D2810	ISV-D3915	ISV-D6015	
Lens	diameter (ØD)	0.95mm	1.8mm	2.4mm	2.8mm	3.9mm	6.0mm
	pixel	0.16M				0.92M	
	resolution	400×400				1280×720	
	depth of field	3-30mm	3-30mm	3-70mm	3-70mm	8-150mm	12-200mm
	bending direction	one direction	two directions	two directions	four directions	four directions	four directions
	bending range (α)	no bending	±160°				
	angle of view (θ)	120°					
	illumination	rear fiber					
	lens	sapphire glass lens					
	dust/waterproof	IP65				IP67	
Cable	length	1m	1m	1m	1m	1.5m	1.5m
	type	spring tube	wire weaved cable				
Main unit	display	6" HD touch screen (resolution: 1920×1080)					
	function	take pictures, take videos					
	file format	picture: JPG, video: MP4					
	image process	image zoom (1X, 2X, 3X, 4X, 5X)					
	image control	freeze, flip over, playback, image comparison and analog ruler					
	memory	built-in 12G storage, memory card					
	output	WIFI (only for Android OS), USB, HDMI					
power supply	rechargeable lithium battery (working time ≥ 8 hours), AC/DC adapter (for continuous working)						
Weight	1000g						

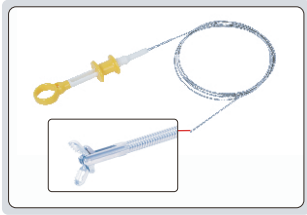

ISV-K-CLAMP (optional)



ISV-K-HOOK (optional)



ISV-K-MAGNET (optional)

STANDARD DELIEVERY

Main unit	1 pc
32G SD card	1 pc
Card reader	1 pc
USB cable	1 pc
Tripod	1 pc
AC/DC adapter	1 pc

OPERATION ENVIRONMENT

Main unit	-20~50°C, no preheat
Operation temperature	-20~70°C
Storage temperature	-20~60°C
Relative humidity	maximum 90%, no condensation

OPTIONAL ACCESSORY

Temperature alarm	ISV-K-HTALARM (must be installed in factory, for ISV-D3915 and ISV-D6015)
Hook	ISV-K-HOOK (must be installed in factory, for ISV-D3915 and ISV-D6015)
Magnet	ISV-K-MAGMET (must be installed in factory, for ISV-D3915 and ISV-D6015)
Clamp	ISV-K-CLAMP