

# VIDEOSCOPES

VIDEO

REAR FIBER ILLUMINATION

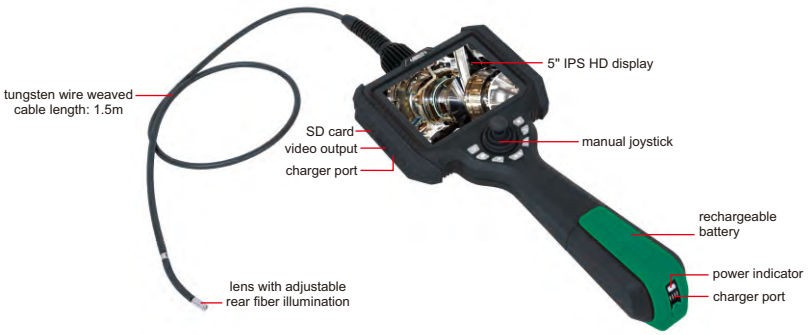


**ISV-K6015**

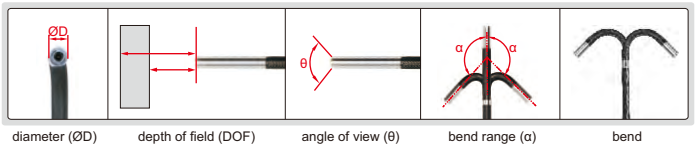


diameter (ØD) | depth of field (DOF) | angle of view (θ) | bend range (α) | bend

## SPECIFICATION

| Code | | ISV-K3915 | ISV-K6015 |
|---|---|---|---|
| Lens | diameter (ØD) | 3.9mm | 6.0mm |
| | pixel | 0.92M | |
| | resolution | 1280×720 | |
| | depth of field | 8-150mm | 12-200mm |
| | bending direction | four directions | |
| | bending range (α) | ±160° | |
| | angle of view (θ) | 120° | |
| | illumination | rear fiber | |
| | lens | sapphire glass lens | |
| | dust/waterproof | IP67 | |
| | bend control | manual joystick | |
| Cable | length | 1.5m | |
| | type | tungsten wire weaved cable | |
| Main unit | display | 5" high definition LCD | |
| | function | take pictures, take videos | |
| | file format | picture: JPG, video: MP4 | |
| | image process | image zoom (1X, 2X, 3X, 4X) | |
| | image control | freeze, flip over, playback and analog ruler | |
| | memory | memory card | |
| | output | USB, HDMI | |
| | power supply | rechargeable lithium battery (working time ≥ 4hours), AC/DC adapter (for continuous working) | |
| Weight | | 1000g | |



changeable lens cable



ISV-K-MAGNET (optional)



ISV-K-HOOK (optional)



ISV-K-CLAMP (optional)

## OPERATION ENVIRONMENT

| | |
|---|---|
| Main unit | -10~50°C, no preheat |
| Operation temperature | -20~70°C |
| Storage temperature | -20~60°C |
| Relative humidity | maximum 90%, no condensation |

## STANDARD DELIVERY

| | |
|---|---|
| Main unit | 1 pc |
| 32G SD card | 1 pc |
| Card reader | 1 pc |
| USB cable | 1 pc |
| Tripod | 1 pc |
| AC/DC adapter | 1 pc |

## OPTIONAL ACCESSORY

| | |
|---|---|
| WIFI output | **ISV-K-WIFI** (must be installed in factory, only for Android OS) |
| Temperature alarm | **ISV-K-HTALARM** (must be installed in factory) |
| Hook | **ISV-K-HOOK** (must be installed in factory) |
| Magnet | **ISV-K-MAGNET** (must be installed in factory) |
| Clamp | **ISV-K-CLAMP** |