


VIDEOSCOPES

REAR FIBER
ILLUMINATION




changeable lens cable

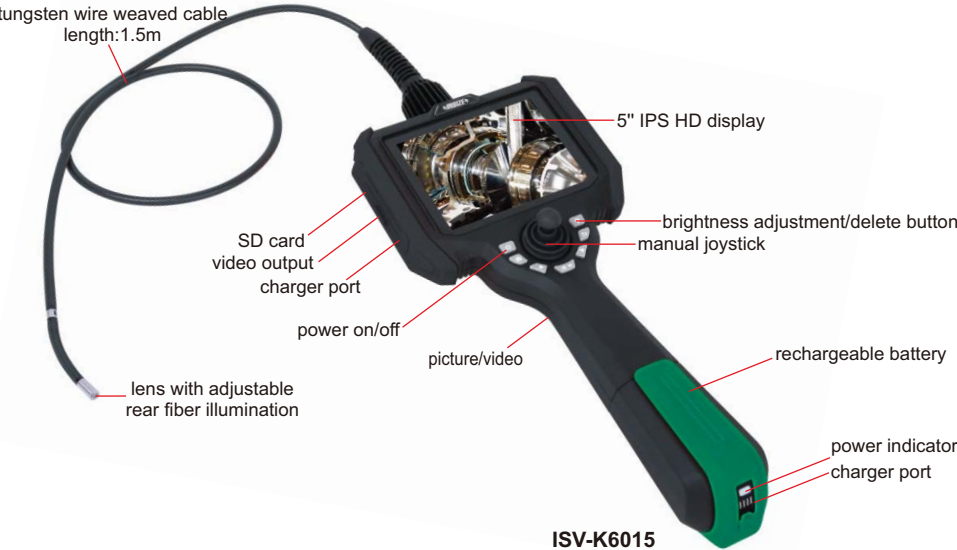


ISV-K-HOOK
(OPTIONAL)



ISV-K-MAGNET
(OPTIONAL)



ISV-K-CLAMP(OPTIONAL)

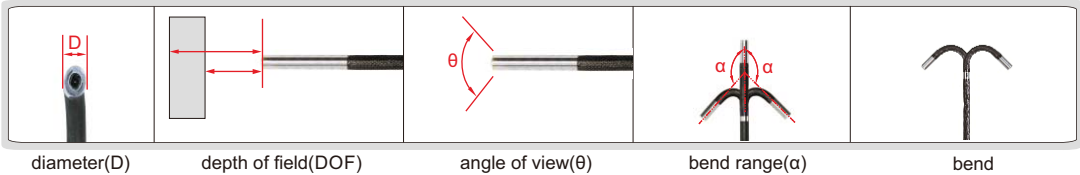

SPECIFICATION

Code		ISV-K1810	ISV-K2410	ISV-K2810	ISV-K3915	ISV-K6015
Lens	diameter	1.8mm	2.4mm	2.8mm	3.9mm	6.0mm
	pixel	0.16M			0.92M	
	resolution	400×400			1280×720	
	depth of field	3-30mm	3-70mm	3-70mm	8-150mm	12-200mm
	bending direction	two directions	two directions	four directions	four directions	four directions
	bending range(α)	±160°				
	angle of view(θ)	120°				
	illumination	rear fiber				
	lens	sapphire glass lens				
	dust/waterproof	IP65			IP67	
	bend control	manual joystick				
Cable	length	1m	1m	1m	1.5m	1.5m
	type	tungsten wire weaved cable				
Main unit	display	5" high definition LCD				
	function	take pictures, take videos				
	file format	picture: JPG, video: MP4				
	image process	image zoom (1X, 2X, 3X, 4X)				
	image control	freeze, flip over, playback and analog ruler				
	memory	memory card				
	output	USB, HDMI				
	power supply	rechargeable lithium battery (working time ≥ 4hours), AC/DC adapter(for continuous working)				
Weight		1000g				

STANDARD DELIEVERY

Main unit	1pc
32G SD card	1pc
Card reader	1pc
USB cable	1pc
Tripod	1pc
AC/DC adapter	1pc

OPERATING ENVIRONMENT

Main unit	-10~50°C, no preheat
Operating temperature	-20~70°C
Storage temperature	-20~60°C
Relative humidity	maximum 90%, no condensation

OPTIONAL ACCESSORY

WIFI output	ISV-K-WIFI(must be installed in factory, only for android OS)
Temperature alarm	ISV-K-HTALARM(must be installed in factory, for ISV-K3915 and ISV-K6015)
Hook	ISV-K-HOOK (must be installed in factory, for ISV-K3915 and ISV-K6015)
Magnet	ISV-K-MAGNET (must be installed in factory, for ISV-K3915 and ISV-K6015)
Clamp	ISV-K-CLAMP