


# FRONT AND SIDE VIEW VIDEOSCOPE


REAR FIBER ILLUMINATION



ISV-S-HOOK(optional)

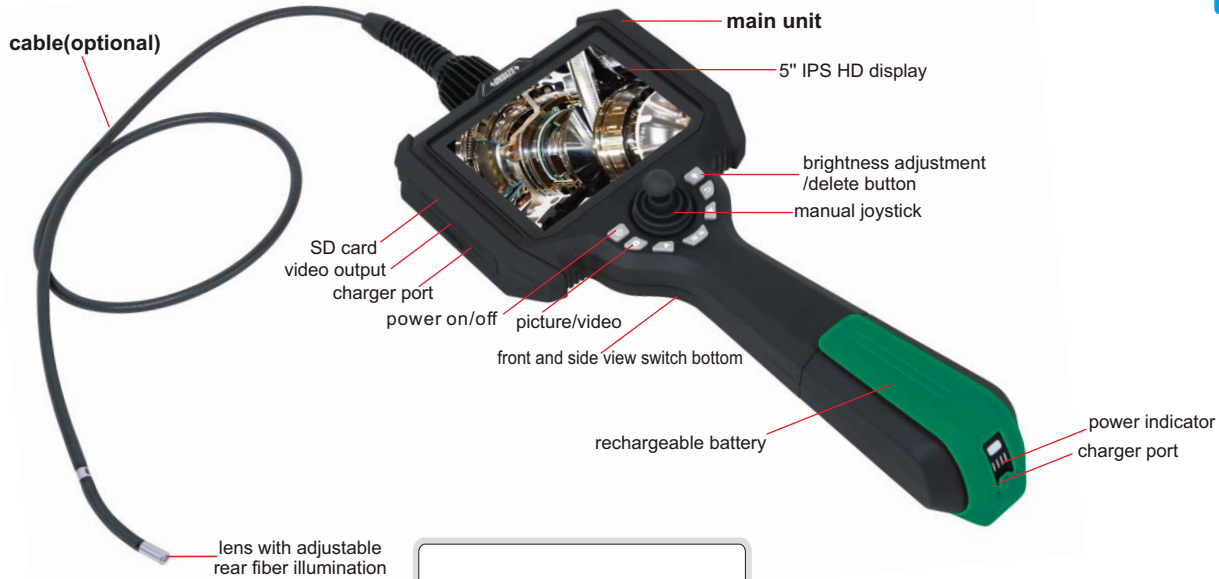

ISV-S-MAGNET(optional)



ISV-S-CLAMP(optional)



tripod(included)



changeable cable

## MAIN UNIT (WITHOUT CABLE)

<b>Code</b>	<b>ISV-S</b>
<b>Display</b>	5" high definition LCD
<b>Resolution</b>	1024×720
<b>Function</b>	take pictures, take videos
<b>File format</b>	picture: JPG, video: MP4
<b>Image process</b>	image zoom (1X, 2X, 3X, 4X)
<b>Image control</b>	freeze, flip over, playback and analog ruler
<b>Memory</b>	memory card
<b>Output</b>	USB, HDMI
<b>Power supply</b>	rechargeable lithium battery (working time ≥ 4hours) AC/DC adapter (for continuous working)
<b>Weight</b>	1000g

## STANDARD DELIEVERY


Main unit	1pc
32G SD card	1pc
Card reader	1pc
USB cable	1pc
Tripod	1pc
AC/DC adapter	1pc

## OPERATING ENVIRONMENT

Main unit	-10~50°C, no preheat
Operating temperature	-20~70°C
Storage temperature	-20~60°C
Relative humidity	maximum 90%, no condensation

## OPTIONAL ACCESSORY

<b>Cable</b>	Please refer to next pages for details
<b>WIFI output</b>	ISV-S-WIFI(must be installed in factory, only for android OS)
<b>Temperature alarm</b>	ISV-S-HTALARM(must be installed in factory)
<b>Hook</b>	ISV-S-HOOK (must be installed in factory)
<b>Magnet</b>	ISV-S-MAGNET (must be installed in factory)
<b>Clamp</b>	ISV-S-CLAMP

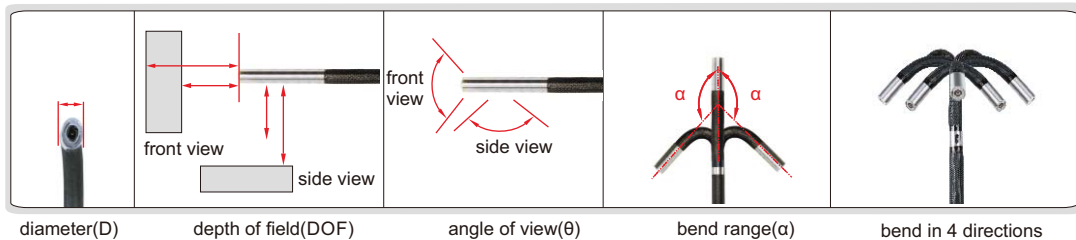

#### FOUR-DIRECTION CABLE, FRONT VIEW&SIDE VIEW

Code	Cable		Lens									
	length	type	view direction	bend direction	diameter (D)	depth of field(DOF)	bend range( $\alpha$ )	angle of view( $\theta$ )	illumination	pixel	resolution	dust/ waterproof
ISV-S6010	1m	tungsten wire weaved cable	front view and side view	four directions	6.0mm	front view: 12~200mm (optional 3~70mm)  side view: 8~150mm (optional 3~70mm)	$\pm 160^\circ$	$> 120^\circ$	rear fiber	0.92M	1280×720	IP67
ISV-S6015	1.5m											
ISV-S6020	2m											
ISV-S6030	3m											
ISV-S6040	4m											
ISV-S6050	5m											