




特征:

1. 连接形式有两种: 短圆柱连接和螺纹连接。
2. 结构紧凑、体积小、操作方便、定心精度高、夹持范围广。
3. 主要与仪表机床和木工机械配套, 适用于工艺品及有色金属, 塑料等非金属材料切削加工。
4. 钢体。

Features:

1. The chucks have two mounting types: the short cylindrical center mounting and the thread mounting.
2. The compact chucks are small volume, easy to be used and enjoy a high centring precision as well as a large clamping range.
3. The chucks are made for meter machine tools in the processing of non-ferrous metals, non-metals like plastics and so on.
4. Steel body.

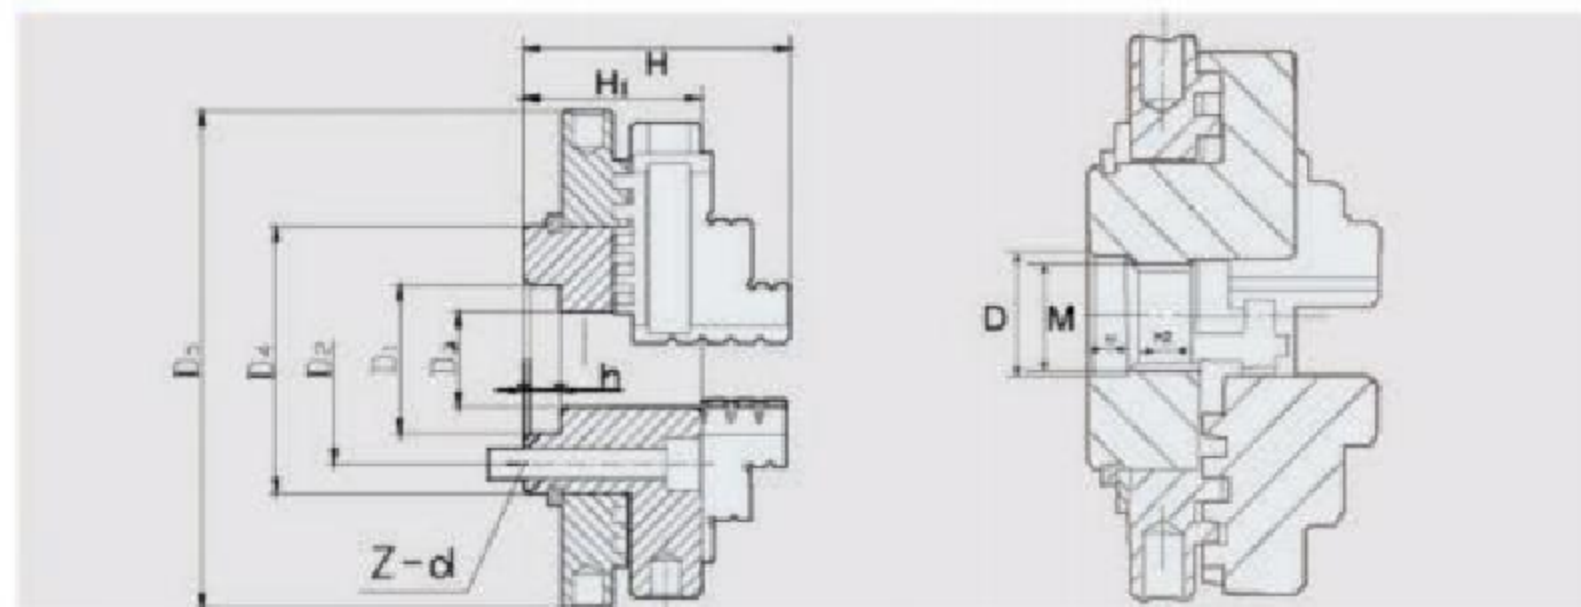

尺寸、性能参数 Dimension characteristic parameters

规格 Size	D	D1	D2	D3	D4	D5	H	H1	h	h1	h2	Z-d	M	夹紧范围 Clamping Range	撑紧范围 Jamming Range	净重 KG N.W.	报价 Unit Price
50	15	-	-	15	30	52	47	33	6	6	12	-	M14 × 1	1-33	16-50	-	
63	15	22	28	14	36	68	42	28	6	6	12	3-M4	M14 × 1	1-50	16-50	0.5	
80	16.1	25	35	16	45	84	42	30	6	5	9.5	3-M5	M16 × 1	1.5-70	20-70	1.5	
100	24.1	32	42	22	52	104	52	36.5	6	5	13.5	3-M6	M24 × 1.5	2-90	26-90	2	




特征:

1. 连接形式有两种: 短圆柱连接和螺纹连接。
2. 结构紧凑、体积小、操作方便、定心精度高、夹持范围广。
3. 主要与仪表机床配套, 适用于有色金属及塑料等非金属材料切削加工。
4. 钢体。

Features:

1. The chucks have two mounting types: the short cylindrical center mounting and the thread mounting.
2. The compact chucks are small volume, easy to be used and enjoy a high centring precision as well as a large clamping range.
3. The chucks are made for meter machine tools in the processing of non-ferrous metals, non-metals like plastics and so on.
4. Steel body.

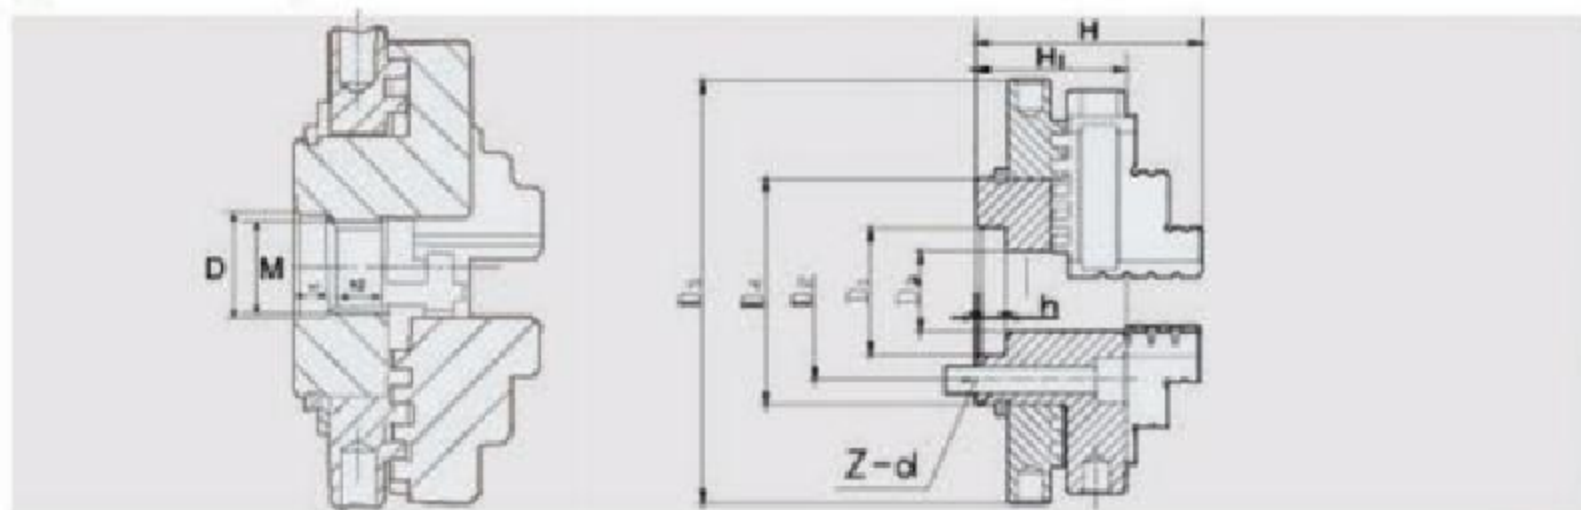

尺寸、性能参数 Dimension characteristic parameters

规格 Size	D	D1	D2	D3	D4	D5	H	H1	h	h1	h2	Z-d	M	夹紧范围 Clamping Range	撑紧范围 Jamming Range	净重 KG N.W.	报价 Unit Price
50	15	-	-	15	30	52	47	33	6	6	12	-	M14 × 1	1-33	16-50	-	
63	15	22	28	14	36	68	42	28	6	6	12	3-M4	M14 × 1	1-50	16-50	0.5	
80	16.1	25	35	16	45	84	42	30	6	5	9.5	3-M5	M16 × 1	1.5-70	20-70	1.5	
100	24.1	32	42	22	52	104	52	36.5	6	5	13.5	3-M6	M24 × 1.5	2-90	26-90	2	