
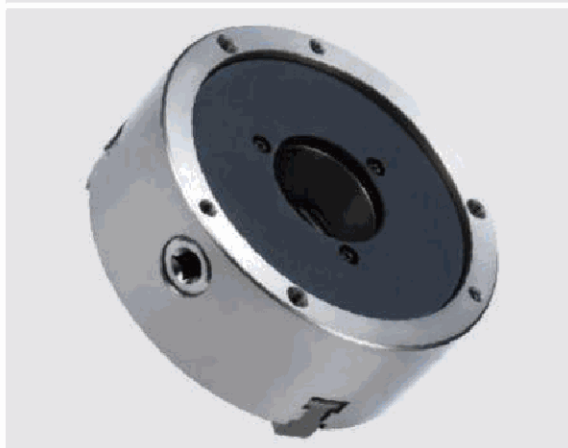


K11——三爪自定心卡盘

THREE-JAW SELF-CENTRING CHUCKS

SAN OU
C H U C K S


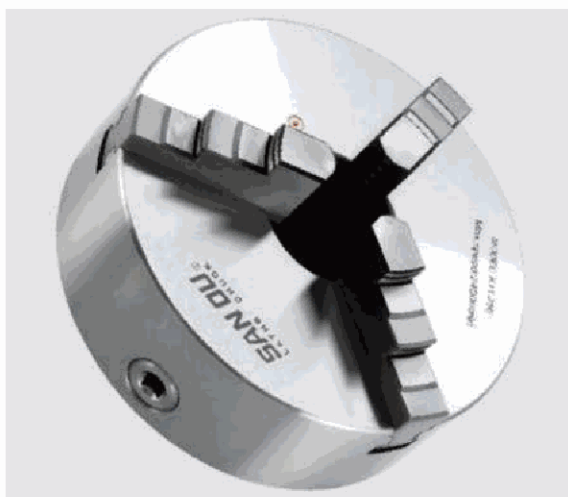


特征:

1. 短圆柱连接形式。
2. K11型卡盘配带整体爪(正卡爪和反卡爪各一副)。
3. K11A、K11C和K11D、K11E型卡盘卡爪为分离爪形式,可调整为正卡爪或反卡爪使用。
4. K11A和K11D、K11E型卡盘卡爪符合ISO3442标准。
5. K11C型卡盘卡爪为传统结构的分离爪。
6. 可提供各种形式的软卡爪。

Features:

1. Short cylindrical center mounting.
2. Model K11 chucks are provide with one-piece jaws (which include a set of internal jaws and a set external ones).
3. The jaws for K11A, K11C and K11D, K11E chuck are composed of two-piece jaws. They can perform as either internal or external jaws through adjustment.
4. The jaws for K11A and K11D, K11E chucks conform to ISO3442 standard.
5. Model K11chucks are supplied with traditional two-piece jaws.
6. We can provide all kinds of soft jaws.

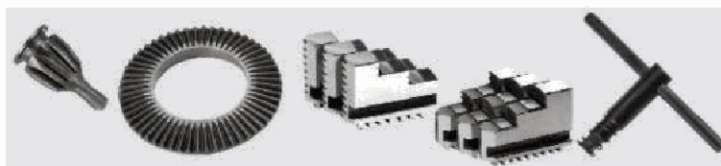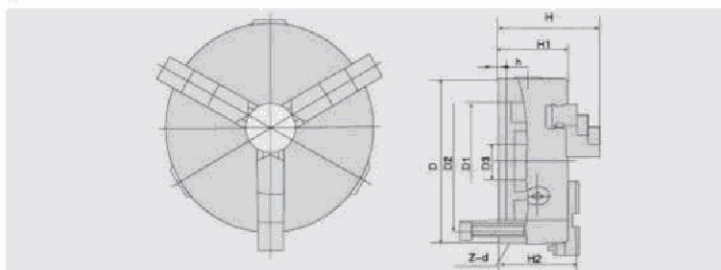

尺寸、性能参数 Dimension characteristic parameters

规格D Size	D1	D2	D3	H	H1	H2	h	Z-d	最大输入扭矩Nm Max input torque	极限转速/min Max speed	重量 Weight(kg)	报价 Unit Price
80	55	66	16	66	50	-	3.5	3-M6	40	4800	1.9	
100	72	84	22	74.5	55	-	3.5	3-M8	60	4200	3.2	
125	95	108	30	84	58	-	4	3-M8	100	3800	5	
130	100	115	30	86	60.5	-	3.5	3-M8	100	3800	5.6	
160	130	142	45	95	65	-	5	3-M8	160	3600	8.8	
160A	130	142	45	109	65	71	5	3-M8	160	3600	8.3	
165	130	145	40	96.5	67.5	-	4.5	3-M8	160	3600	9.5	
190	155	172	54	105	75	-	5	3-M10	250	3000	13.8	
200	165	180	65	109	75	-	5	3-M10	250	3000	15.5	
200C	165	180	65	122	75	78	5	3-M10	250	3000	14.1	
200A	165	180	65	122	75	80	5	3-M10	250	3000	14.1	
240	195	215	70	120	80	-	8	3-M12	320	2400	24	
240C	195	215	70	130	80	84	8	3-M12	320	2400	20	
250	206	226	80	120	80	-	5	3-M12	320	2400	25.7	
250C	206	226	80	130	80	84	5	3-M12	320	2400	23	
250A	206	226	80	136	80	86	5	3-M12	320	2400	23	
315	260	285	100	141.5	90	-	6	3-M16	400	1800	47	
315A	260	285	100	153	90	95	6	3-M16	400	1800	41	
320	270	290	100	143.5	95	-	11	3-M16	400	1800	47.5	
320C	270	290	100	153.5	95	101.5	11	3-M16	400	1800	42	
325	272	296	100	149.5	97	-	12	3-M16	400	1800	49	
325C	272	296	100	154.5	97	102.5	12	3-M16	400	1800	44	
325A	272	296	100	160.5	97	102.5	12	3-M16	400	1800	46	
380	325	350	145	155.7	102.5	-	8	3-M16	500	1200	65	
380C	325	350	145	156.5	102.5	104.5	6	3-M16	500	1200	60	
380A	325	350	145	171.5	102.5	107.5	6	3-M16	500	1200	62	
400	340	368	145	155	101.5	110	6	3-M16	500	1200	71	
500	440	465	210	175	115.4	126	6	6-M16	630	850	117.6	
500A	440	465	210	197	115.4	126	6	6-M16	630	850	119	
630A	560	595	280	218	135	142	7	6-M16	800	600	208	
800A	710	760	385	249	150	167	8.5	6-M20	1000	500	256	
1000A	905	950	460	310	198	216	9	6-M24	1200	400	745.6	
1250A	1060	1150	550	310	195	203.5	12	6-M30	1300	320	1516	