

K12——四爪自定心卡盘

FOUR-JAW SELF-CENTRING CHUCKS




SAN OU
C H U C K

特征:

- 1.短圆柱连接形式。
- 2.K12型卡盘配带整体爪（正卡爪和反卡爪各一副）。
- 3.K12A、K12C和K12D型卡盘卡爪为分离爪形式，可调整为正卡爪或反卡爪使用。
- 4.K12A和K12D型卡盘卡爪符合ISO3442标准。
- 5.K12C型卡盘卡爪为传统结构的分离爪。
- 6.可提供各种形式的软卡爪。
- 7.按用户需求，可提供前穿螺钉安装方式卡盘。

Features:

- 1.Short cylindrical center mounting.
- 2.Model K12 chucks are provided with one-piece jaws(which include a set of internal jaws and a set of external ones).
- 3.The jaws for K12A,K12C and K12D chucks are composed of two-piece jaws. They can perform as either internal jaws through adjustment.
- 4.The jaws for K12A and K12D chucks conform to ISO3442 standard.
- 5.Model K12C chucks are supplied with traditional two-piece jaws.
- 6.We can provide all kinds of soft jaws.
- 7.As requested,we can provide chucks mounted from front.

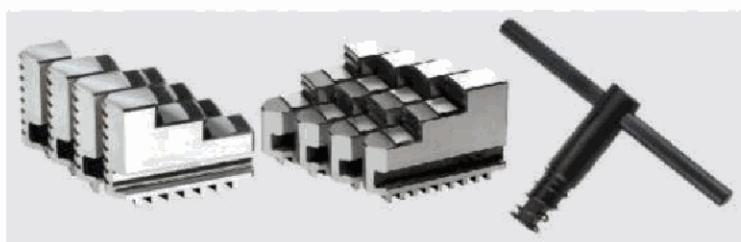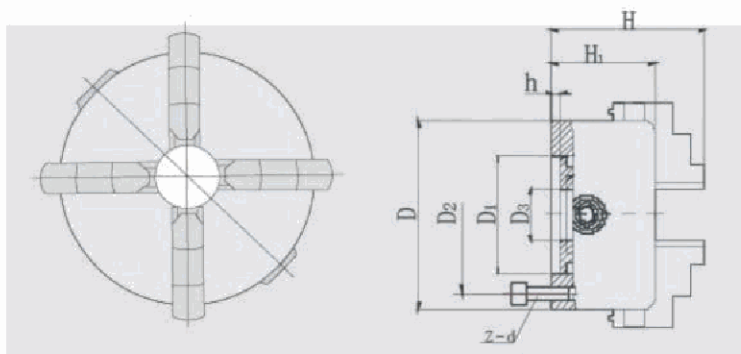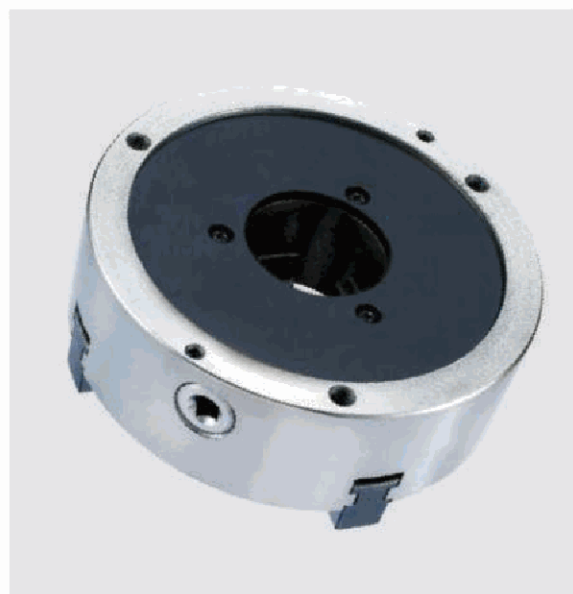

尺寸、性能参数 Dimension characteristic parameters

规格D Size	D1	D2	D3	H	H1	h	Z-d	最大输入扭矩Nm Max input torque	极限转r/min Max speed	重量(kg) Weight(kg)	报价 Unit Price
80G	55	66	16	66	50	3.5	3-M6	40	4000		
100	72	84	22	75	55	3.5	3-M8	60	3500		
125	95	108	30	84	58	4	3-M8	100	3000		
130	100	115	30	86	60.5	3.5	3-M8	100	3000		
160	130	142	45	95	65	5	3-M8	160	2500		
165	130	145	40	96.5	67.5	4.5	3-M8	160	2500		
190	155	172	54	115	75	5	3-M10	250	2000		
200	165	180	65	113	75	5	3-M10	250	2000		
240	195	215	70	124	80	8	3-M12	320	1600		
250	206	226	80	124	80	5	3-M12	320	1600		
315	260	285	100	141.5	90	6	3-M16	400	1200		
320	270	290	100	148.5	95	11	3-M16	400	1200		
325	272	296	100	149.5	97	12	3-M16	400	1200		
380	325	350	145	156	102.5	6	3-M16	500	1000		
400	340	368	145	155	101.5	6	3-M16	500	1000		
500	440	465	210	174	115.4	6	6-M16	630	800		
630	560	595	280	204	135	7	6-M16	630	600		
800	710	760	385	239	150	8.5	6-M20	1000	500		
1000A	910	950	460	295	180	9	6-M24	1200	400		
1250	1060	1150	550	341	228	11	6-M30	1300	320		

K12短锥系列其连接尺寸同K11三爪短锥系列。

K12 short taper series have the same mountong dimensions as K11 three jaw short tape series