


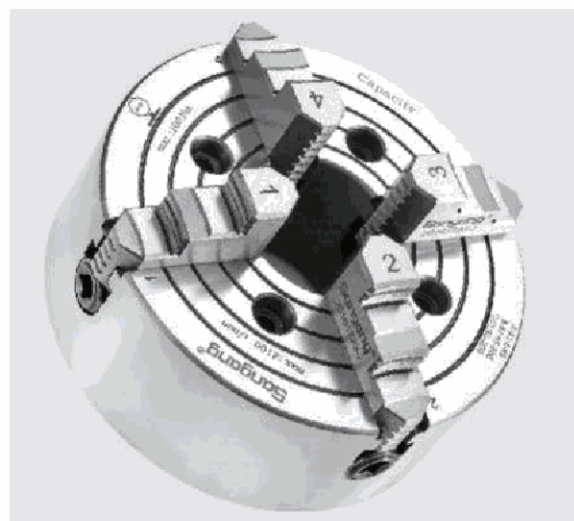

适用范围：有色金属及塑料，非金属等
切削加工。


特征：

- ① 高精度短圆柱连接。
- ② 易损部件都经过特殊淬火处理，有效地提高耐磨性和使用寿命。
- ③ 单动调整中心，可用于各种形状加工，更大的夹紧力。

Application: Recommended for processing of non-ferrous metals, non-metals like plastics and so on.

Features:

- ① High precision short cylindrical center mounting.
- ② Flimsy parts are specifically engineered by quenching, for greater durability and extended life.
- ③ Adjusted independently to center, suitable for processing special with superior gripping force.

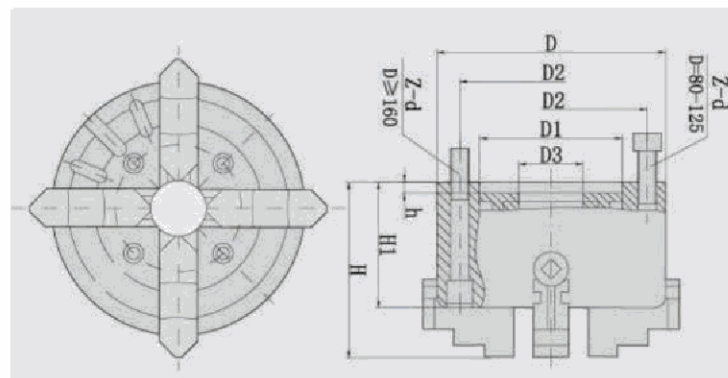

尺寸、性能参数 Dimension characteristic parameters

规格Size mm	D1	D2	D3	H1	h	z-d	净重kg Net WT	极限转速r/min Max.speed
80	55	66	22	42	4	3-M6	2.5	4800
100	72	84	25	54	4	4-M8	3	4800
125	95	108	30	56	6	4-M8	5	4200
160	65	95	55	65	5	4-M10	9	3800
200	80	112	70	71	6	4-M10	15	2100
250	110	130	100	80	6	4-M12	23	1800
300	152	130	95	100	6	4-M12	39	1400
320	140	165	115	100	6	4-M16	40	1400
350	130	168	115	100	6	4-M16	53	1400
400	160	185	125	101	8	4-M16	55	950
500	200	236	170	106	8	4-M20	102	600
630	220	258	180	118	10	4-M20	159	500
800	250	300	220	145	12	8-M20	/	500
1000	320	370	305	170	15	8-M20	/	400
1250	400	500	385	185	15	8-M20	/	300
1400	400	500	305	155	15	8-M20		
1600	420	520	320	175	20	8-M24		