





特征:

- 1. 连接形式有两种: 短圆柱连接和螺纹连接。
- 2. 结构紧凑、体积小、操作方便、定心精度高、夹持范围广。
- 3. 主要与仪表机床配套, 适用于有色金属及塑料等非金属的切削加工。

Features:

- 1. The chucks have two mounting types: the short cylindrical center mounting and the thread mounting.
- 2. The compact chucks are small volume, easy to be used and enjoy a high centring precision as well as a large clamping range.
- 3. The chucks are made for meter machine tools in the processing of non-ferrous metals, non-metals like plastics and so on.

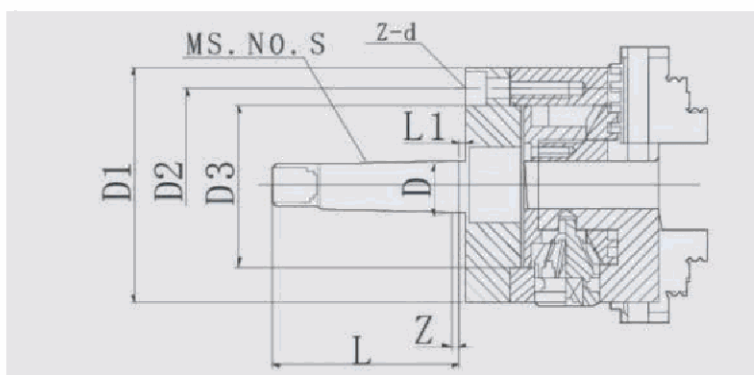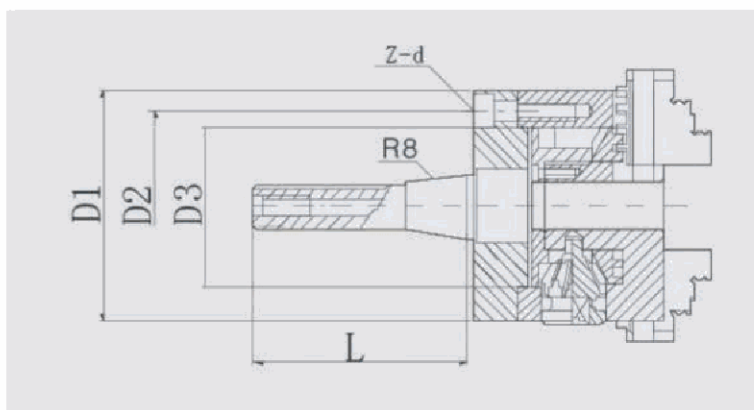

尺寸、性能参数 Dimension characteristic parameters

规格 Size	D	D1	D2	D3	L +IT10/2	Z±0.05	L1	z-d
MS1-3"	12.065	80	66	55	53.5	1	3.5	3-M6
MS2-3"	17.780	80	66	55	64	1	5	3-M6
MS3-3"	23.825	80	66	55	81	1	5	3-M6
MS4-3"	31.267	80	66	55	102.5	1.5	6.5	3-M6
MS5-3"	44.399	80	66	55	129.5	1.5	6.5	3-M6
MS1-4"	12.065	100	84	72	53.5	1	3.5	3-M8
MS2-4"	17.780	100	84	72	64	1	5	3-M8
MS3-4"	23.825	100	84	72	81	1	5	3-M8
MS4-4"	31.267	100	84	72	102.5	1.5	6.5	3-M8
MS5-4"	44.399	100	84	72	129.5	1.5	6.5	3-M8
MS3-5"	23.825	125	108	95	81	1.5	5	3-M8
MS4-6"	31.267	125	108	95	102.5	1.5	6.5	3-M8
MS5-6"	44.399	160	142	130	129.5	1.5	6.5	3-M8
MS5-8"	44.399	200	180	165	129.5	1.5	6.5	3-M10
MS5-10"	44.399	250	226	206	129.5	1.5	6.5	3-M12
R8-KB11 3"	/	80	66	55	126	/	/	3-M6
R8-KB11 4"	/	100	84	72	126	/	/	3-M8