



## Small Dial Gauge KM 4 T

Käfer


Our Small Dial Gauges have 40 mm Ø bezel. As standard they have 0.5 mm travel range per revolution and 50 graduations on the dial. This offers the advantage of a clear and easily readable Dial Gauge.

Spindle and stem are made of resistant stainless steel. The spindle is lapped.

On request the Dial Gauge KM 4 T is also available with lifting device and with special transmission ratio, range per revolution = 1 mm.

### Small Dial Gauge KM 4 T

|                                                               |                         |
|---------------------------------------------------------------|-------------------------|
| Reading                                                       | 0.01 mm                 |
| Range                                                         | 3 mm                    |
| Range per revolution                                          | 0.5 mm                  |
| Bezel-Ø                                                       | 40 mm                   |
| Stem-Ø                                                        | 8 h 6                   |
| Dimensions and accuracy according to DIN EN ISO 463 / DIN 878 |                         |
| Initial measuring force                                       | 0.8 N ± 20%             |
| Dimensioned drawing                                           | page 25                 |
| Data sheet to DIN EN ISO 463                                  | www.kaefer-messuhren.de |

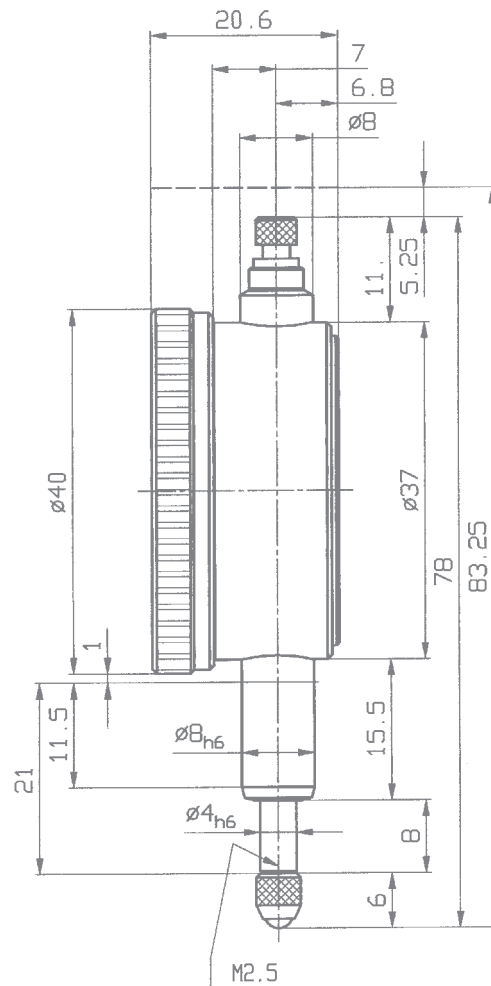

Special fittings:

