


OPERATION INSTRUCTION

Universal Protractor 2372-360



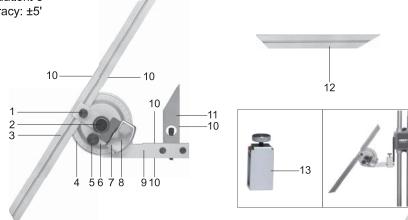

1-Fixture block

2-Brake

3-300mm blade

4-Main scale 5-Fine adjustment

9-Base 10-Measuring faces 11-Angle attachment

6-Dial plate 12-150mm blade

- 1. Install blade and angle attachment:
 - --- Loosen fixture block
 - --- Install blade, insert blade along the slot(fig 1), lock fixture block

7-Magnifier

8-Vernier scale

--- Install angle attachment as the fig 2 if needing it during measurement








13-Clamp for height gauges (Optional accessory, code: 2372-CLAMP)

fig.2


2. Please clean the measuring faces with soft cloth before measurement, avoid dust or sundry to effect the results.

3. Measurement diagrams:

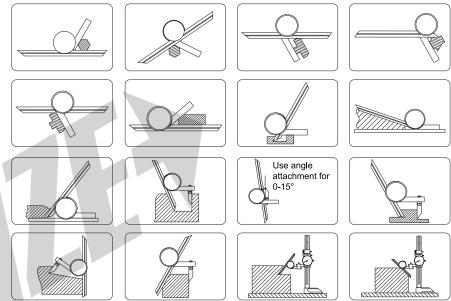


4. The reading is obtained by adding the reading of the vernier scale to that of the main scale. Take the vernier scale reading at the graduation which coincides with the one on the main scale. Details please refer to following figures.

scale, read the left side of vernier scale.



Vernier scale increases counterclockwise Vernier scale increases clockwise to main to main scale after '0' graduation in vernier scale after '0' graduation in vernier scale, read the right side of vernier scale.



Main scale reading: 15° Vernier scale reading: 15°25' Reading:

MN-2372-360-C/E