


PULL STUD BOLT & SPANNER

ANZUGBOLZEN
BOULONS/DESERRAGE
TIRANTI PERMANDRINI UNIVERSALI
TIRANTES PARA PORTA-HERRAMIENTAS

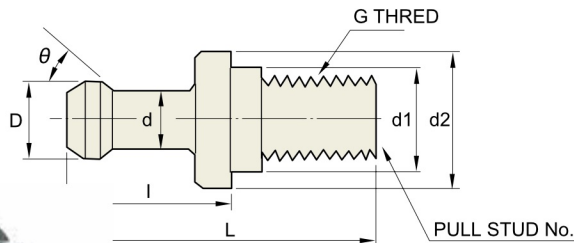

Pull Stud Bolt

Unit : mm

MODELNo.	EDPNo.	D	d2	d1	d	L	I	G	O	TYPE
PS-1	P2775051	15	23	17	10	60	35	M16	45°	BT40 _r STANDARD TYPE
PS-2	P2775052	15	23	17	10	60	35	M16	60°	BT40 _R STANDARD TYPE
PS-805	P2775101	19	23	17	14	54	29	M16	75°	BT40
PS-806	P2775102	19	23	17	14	54	29	M16	75°	BT40(Through Hole)
PS-5	P2775053	23	38	25	17	85	45	M24	45°	BT50 _r STANDARD TYPE
PS-6	P2775054	23	38	25	17	85	45	M24	60°	BT50 _R STANDARD TYPE
PS-16	P2775055	11	16.5	12.5	7	43	23	M12	45°	BT30 _r STANDARD TYPE
PS-17	P2775056	11	16.5	12.5	7	43	23	M12	60°	BT30 _R STANDARD TYPE
PS-0	P2506706	23	38	25	17	85	45	M24	90°	for BT50 OKK
PS-08	P2506703	15	23	17	10	60	35	M16	90°	for BT40 OKK
PS-P	P2775057	24	36	25	18	71	31	M24	90°	for BT50 MITSUI SEIKI
PS-P5	P2775058	15	23	17	10	50	25	M16	90°	for BT40 MITSUI SEIKI
PS-G41	P2775059	29	37	25	21	65.2	25.2	M24	45°	for BT50 MAZAK
PS-G51	P2775060	18.8	22	17	12.45	44.1	19.1	M16	45°	for BT40 MAZAK
PS-S2	P2775061	25	39	25	18	95	55	M24	60°	for SHIN NIPPONKOKI
PS-F1	P2775062	23	39	25	18	104	64	M24	45°	for MITSUBISHI
PS-B1	P2775063	22	38	25	16	112	72	M24	60°	for OKUMA
PSS-1	P2506707	19	23	17	14	54	26	M16	75°	for SK40
PSS-5	P2506708	28	36	25	21	74	34	M24	75°	for SK50

* Upon requests, other pull stud bolts with special dimensions could be produced and supplied.

* Through hole type ("H" Type) is available upon request.