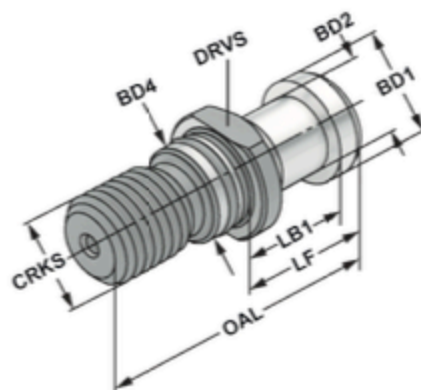


Pull studs ISO 7388-3 | shank form AF | Without cooling lubricant supply | formerly DIN 69872 B

Tirettes ISO 7388-3 | forme AF | sans arrosage | l'ancien DIN 69872 A

ISO
7388-3Form
AFBestell-Nr.
Order no.
Référence

CRKS

OAL

LF

LB1

BD1

BD2

BD4

CND

BHTA

DRVS

403.20.16

M16

54

26

20

19

14

17

-

15°

19

503.20.24

M24

74

34

25

28

21

25

-

15°

30

Form AF | ohne Durchgangsbohrung | inkl. O-Ring | ehemals DIN 69872 B / DIN 69872 Form B

Form AF | sealed | incl. O-ring | formerly DIN 69872 B / DIN 69872 Form B

Forme AF | étanche | avec joint torique | l'ancien DIN 69872 B / DIN 69872 Form B

Verwendung:

Für Werkzeuge mit Steilkegelschaft ISO 7388-1 (ehemals DIN 69871)

Application:

For tools with taper shanks ISO 7388-1 (formerly DIN 69871)

Utilisation:

Pour les outils avec queue conique ISO 7388-1 (l'ancien DIN 69871)