


# Ref. 32180

## SPHERICAL



| P    |        |        |        | M    |        | K    |      |        | N  |    |       |         | S  |    | H      |        |        |
|------|--------|--------|--------|------|--------|------|------|--------|----|----|-------|---------|----|----|--------|--------|--------|
| >800 | >1.000 | >1.200 | >1.400 | >950 | >1.200 | >500 | >800 | >1.400 | Al | Cu | Mg/Zn | Plastic | Ti | Ni | 50 HRC | 55 HRC | 60 HRC |

Vc (m/mm) ● Best ○ Alternative

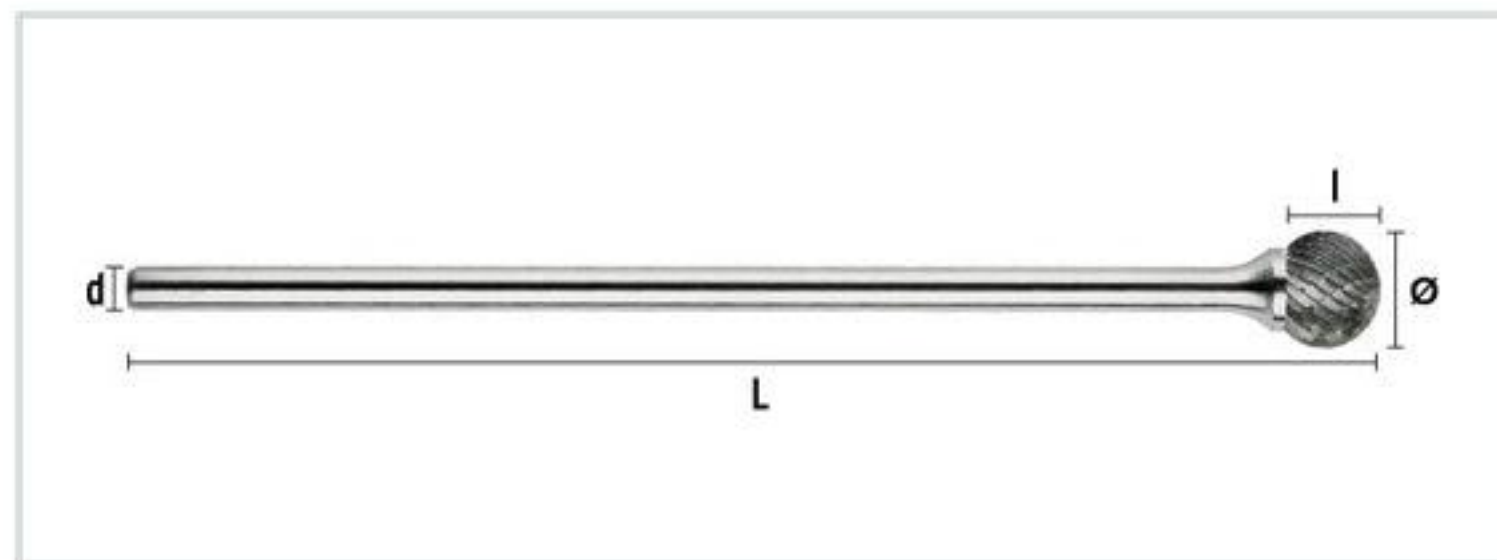

### Características técnicas:

- › Carbide HM
- › Spherical Shape
- › CROSS tooth
- › Long serie

### Aplicaciones:

Soft magnetic steels, construction and cementation steels, and non-alloy and alloy carbon steels up to a strength of 1,100 N / mm<sup>2</sup>