



STYLE A



STYLE B

适用范围：CNC加工中心。


特征：

1. 高精度莫氏圆锥连接。
2. 科学的设计，避免接杆与夹头连接的误差。
3. 具有高精度，高夹紧，高可靠性和稳定性。
4. 易损部件淬火处理。
5. 具有自紧功能，轻轻夹紧钻头即可，在钻孔中随着扭矩的增加而同步增加夹持力，并能产生明显的高强度夹持力，从而防钻头打滑。

Application: Recommended for CNC machining center.

Features:

1. High precision morse taper.
2. This integrated design makes it impossible for the arbor and the drill chuck to become accidentally separated.
3. High precision and high gripping force, high reliability and stability.
4. Flimsy parts are shaped by quenching.
5. Self-tightening feature automatically increase gripping force proportional to increased torque to prevent tool shank slippage.

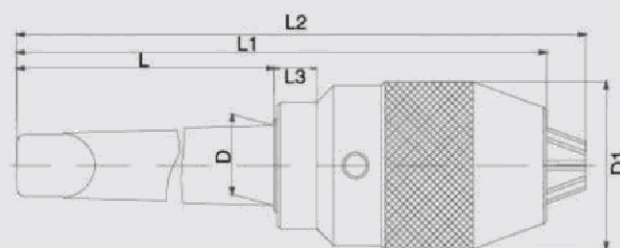

工厂编号 Art.No	型号 Model	夹持范围 mm	Capacity Inch	D1(±0.5mm) L	尺寸 1(±0.5)	Dimensione L2(±1)	L	D	报价 Unit Price
811106	MT1-08	0-8	0-5/16"	-	-	-	-	-	
821106	MT1-10	1.0-10	1/32"-3/8"	-	-	-	-	-	
811124	MT2-08	0-8	0-5/16"	36	122.5	131	63	17.780	
821124	MT2-10	1.0-10	1/32"-3/8"	43.5	136	145	63	17.780	
831124	MT2-13	1.0-13	1/32-1/2	51	163	174	63	17.780	
831123	MT3-13	1.0-13	1/32-1/2	51	181	192.5	99.5	23.825	
841123	MT3-16	1.0-16	1/32-5/8	56.5	192	207	99.5	23.825	
831126	MT4-13	1.0-13	1/32-1/2	51	207	218.5	125	31.542	
841126	MT4-16	1.0-16	1/32-5/8	56.5	219	234.5	125	31.542	