
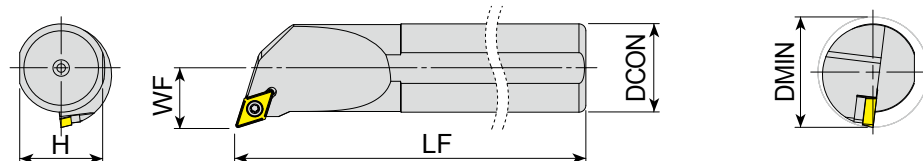



Screw on type for DC** Insert

..SDQCR Shown



: p. 59 Unit:mm

Series	Designation	EDP 2700.. R L	DMIN	DCON	H	WF	LF	Insert
 ..SDPCR/L Approach angle 117.5°	S10K - SDPCR/L07	1162 1163	13	10	9	7	125	DC0702
	S12K - SDPCR/L07	1164 1165	16	12	11	9	125	
	S16P - SDPCR/L11	1166 1167	20	16	14.8	11	170	DC11T3
	S25S - SDPCR/L11	1170 1171	32	25	23	17	250	
 ..SDQCR/L Approach angle 107.5°	A10H - SDQCR/L 07	1172 1173	13	10	9	7	100	DC0702
	A12H - SDQCR/L 07	1174 1175	16	12	11	9	100	
	A16M - SDQCR/L 07	1176 1177	20	16	14.8	11	150	
	A20P - SDQCR/L 07	1178 1179	25	20	18.3	13	170	
	S10K - SDQCR/L 07	1188 1189	13	10	9	7	125	
	S12K - SDQCR/L 07	1190 1191	16	12	11	9	125	
	S16P - SDQCR/L 07	1192 1193	20	16	14.8	11	170	DC11T3
	S20R - SDQCR/L 07	1194 1195	25	20	18.3	13	200	
	A16M - SDQCR/L 11	1180 1181	20	16	14.8	11	150	
	A20P - SDQCR/L 11	1182 1183	25	20	18.3	13	170	
	A25R - SDQCR/L 11	1184 1185	32	25	23	17	200	
	A32S - SDQCR/L 11	1186 1187	40	32	30	22	250	
X	S16P - SDQCR/L 11	1196 1197	20	16	14.8	11	170	DC11T3
	S20R - SDQCR/L 11	1198 1199	25	20	18.3	13	200	
	S25S - SDQCR/L 11	1200 1201	32	25	23	17	250	
	S32T - SDQCR/L 11	1202 1203	40	32	30	22	300	
	S40U - SDQCR/L 11	1204 1205	50	40	37.5	27	350	

▶ NEXT PAGE

Series	Designation	Information	Screw	Shim	Shim Screw	Torx Key
..SD..	..07	Description	Y4008-M2.5x6	-	-	Y80-T08
		EDP	18000127	-	-	18000165
	..11	Description	Y4008-M2.5x6	-	-	Y80-T15
		EDP	18000127	-	-	18000167
	..16..11	Description	Y4015-M3.5x9	-	-	Y80-T15
		EDP	18000131	-	-	18000167
	..20..11	Description	Y4015-M3.5x11	-	-	Y80-T15
		EDP	18000118	-	-	18000167
	..25..11	Description	Y4015-M3.5x12	YAADN-2-0001	YAAV-08-M3.5x8	Y80-T15
		EDP	18000128	18000140	18000162	18000167
	..32..11	Description	Y4015-M3.5x14	YAADN-2-0001	YAAV-06-M3.5x11	Y80-T15
		EDP	18000129	18000140	18000159	18000162