

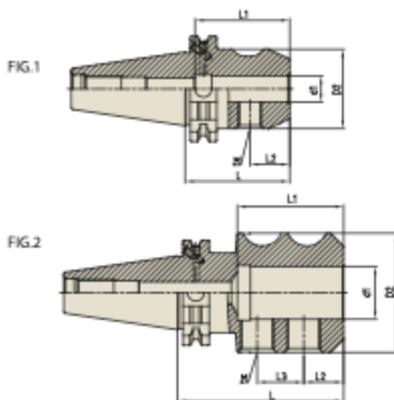
Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40	SK40AD/B-EMH6-50	P2779030	6	25	50	35	18	-	M6	1	0.86
	SK40AD/B-EMH6-100	P2779137	6	25	100	35	18	-	M6	1	-
	SK40AD/B-EMH6-130	P2779138	6	25	130	35	18	-	M6	1	-
	SK40AD/B-EMH6-160	P2779139	6	25	160	35	18	-	M6	1	-
	SK40AD/B-EMH8-50	P2779031	8	28	50	35	18	-	M8	1	0.89
	SK40AD/B-EMH8-100	P2779140	8	28	100	35	18	-	M8	1	-
	SK40AD/B-EMH8-130	P2779170	8	28	130	35	18	-	M8	1	-
	SK40AD/B-EMH8-160	P2779171	8	28	160	35	18	-	M8	1	-
	SK40AD/B-EMH10-50	P2779032	10	35	50	39	20	-	M10	1	0.95
	SK40AD/B-EMH10-100	P2779088	10	35	100	39	20	-	M10	1	-
	SK40AD/B-EMH10-130	P2779089	10	35	130	39	20	-	M10	1	-
	SK40AD/B-EMH10-160	P2779090	10	35	160	39	20	-	M10	1	-
	SK40AD/B-EMH12-50	P2779033	12	42	50	46	22.5	-	M12	1	1.03
	SK40AD/B-EMH12-100	P2779091	12	42	100	46	22.5	-	M12	1	-
	SK40AD/B-EMH12-130	P2779092	12	42	130	46	22.5	-	M12	1	-
	SK40AD/B-EMH12-160	P2779093	12	42	160	46	22.5	-	M12	1	-
	SK40AD/B-EMH16-63	P2779034	16	48	63	57	24	-	M14	1	1.26
	SK40AD/B-EMH16-100	P2779094	16	48	100	57	24	-	M14	1	-
	SK40AD/B-EMH16-130	P2779095	16	48	130	57	24	-	M14	1	-
	SK40AD/B-EMH16-160	P2779096	16	48	160	57	24	-	M14	1	-
	SK40AD/B-EMH20-63	P2779035	20	52	63	52	25	-	M16	1	1.28
	SK40AD/B-EMH20-100	P2779098	20	52	100	52	25	-	M16	1	-
	SK40AD/B-EMH20-130	P2779099	20	52	130	52	25	-	M16	1	-
	SK40AD/B-EMH20-160	P2779100	20	52	160	52	25	-	M16	1	-
	SK40AD/B-EMH25-100	P2779036	25	65	100	60	24	25	M18	2	2.28
	SK40AD/B-EMH25-160	P2779131	25	65	160	60	24	25	M18	2	-
	SK40AD/B-EMH32-100	P2779037	32	72	100	64	24	28	M20	2	2.50
	SK40AD/B-EMH32-160	P2779133	32	72	100	64	24	28	M20	2	-
SK40AD/B-EMH40-120	P2779135	40	80	120	74	30	32	M20	2	-	
SK40AD/B-EMH40-160	P2779136	40	80	160	74	30	32	M20	2	-	

▶ NEXT PAGE

- ▶ Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.
- ▶ Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch shank is available upon request.
- ▶ Combi-style holder with ball jointed clamping screw which can be used with cutting tools with weldon and Whistle notch shank is available.

END MILL HOLDER

EMH


Units: mm

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
50	SK50AD/B-EMH6-63	P2779038	6	25	50	35	18	-	M6	1	2.70
	SK50AD/B-EMH8-63	P2779039	8	28	50	35	18	-	M8	1	2.70
	SK50AD/B-EMH10-63	P2779040	10	35	50	39	20	-	M10	1	2.90
	SK50AD/B-EMH12-63	P2779041	12	42	63	46	22.5	-	M12	1	2.90
	SK50AD/B-EMH16-63	P2779042	16	48	63	49	24	-	M14	1	3.00
	SK50AD/B-EMH20-63	P2779043	20	52	63	52	25	-	M16	1	3.05
	SK50AD/B-EMH25-80	P2779044	25	65	80	60	24	25	M18	2	3.73
	SK50AD/B-EMH32-100	P2779045	32	72	100	64	24	28	M20	2	4.53

- ▶ Balancing grade G2.5 at 25,000 RPM or U max <1 gmm.
- ▶ Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch shank is available upon request.
- ▶ Combi-style holder with ball jointed clamping screw which can be used with cutting tools with weldon and Whistle notch shank is available.