




**TOOLING
SYSTEM**

HYDRAULIC CHUCK (Power E Hydro)

HCP

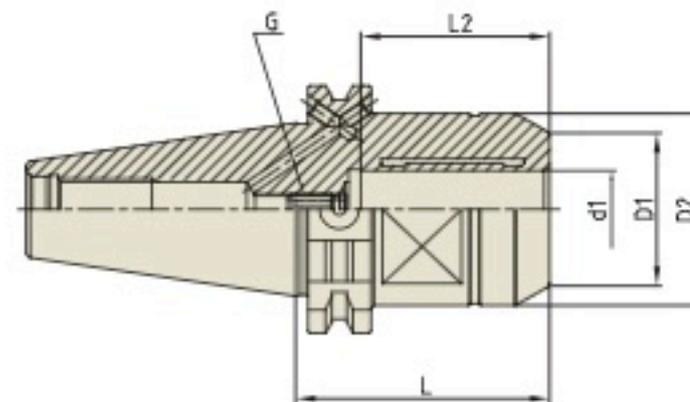

DIN
69871-
SK



2.5G

25,000
RPM

(at 3D)
≤ 3μm

ADIB

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	WEIGHT (Kg)
40	SK40AD/B-HC12P-50	P2776651P	12	32	42	50	41	M8x1.0	1.00
	SK40AD/B-HC20P-64.5	P2534001P	20	39.3	49.3	64.5	48	M8x1.0	1.20
50	SK50AD/B-HC20P-64.5	P2756010P	20	39.3	49.3	64.5	48	M8x1.0	2.80
	SK50AD/B-HC32P-81	P2534002P	32	58.5	72	81	57	M8x1.0	3.90

- ▶ For applicable hydraulic chuck collet, please refer to page 80-82.
- ▶ Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.
- ▶ Supplied with clamping T-wrench.

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/MA S 403)

(D)