


HYDRAULIC CHUCK (For Mold and Die)

HMC

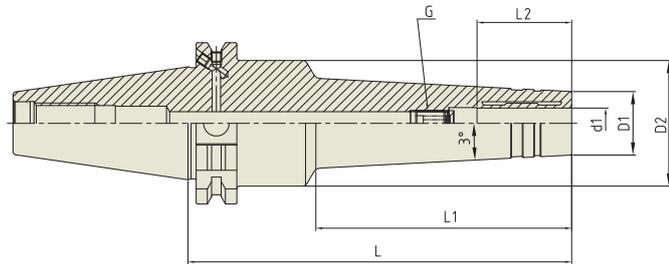

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
40	SK40AD/B-HMC6-120	P2770701	6	20	49.5	120	70	27	M5×0.8	1.40
	SK40AD/B-HMC6-150	P2770702	6	20	49.5	150	100	27	M5×0.8	1.65
	SK40AD/B-HMC8-120	P2770703	8	22	49.5	120	70	27	M6×1.0	1.40
	SK40AD/B-HMC8-150	P2770704	8	22	49.5	150	100	27	M6×1.0	1.65
	SK40AD/B-HMC10-120	P2770705	10	24	49.5	120	70	32	M8×1.0	1.40
	SK40AD/B-HMC10-150	P2770706	10	24	49.5	150	100	32	M8×1.0	1.65
	SK40AD/B-HMC12-120	P2770707	12	25	49.5	120	70	37	M10×1.0	1.40
	SK40AD/B-HMC12-150	P2770708	12	25	49.5	150	100	37	M10×1.0	1.65
	SK40AD/B-HMC20-120	P2770711	20	34	49.5	120	70	42	M16×1.0	1.50
	SK40AD/B-HMC20-150	P2770712	20	34	49.5	150	100	42	M16×1.0	1.70

- ▶ For applicable hydraulic chuck collet, please refer to page 80-82.
- ▶ Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.
- ▶ Supplied with clamping T-wrench.

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/IAS 403)

HSK
(DIN 69893/ISO 12164)

STRAIGHT TYPE & SET

ACCESSORY & PARTS