
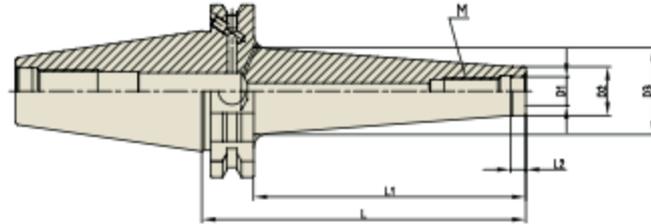


COPY MILL ARBOR

M

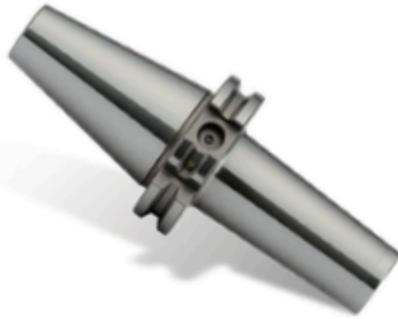

Unit : mm

TAPER No.	MODEL No. (M-L1)	EDP No.	D1	D2	D3	L	L1	L2	WEIGHT (Kg)
40	SK40AD/B-M6-25	P2801701	6.5	10	13	44	25	5	0.80
	SK40AD/B-M10-5	P2801706	10.5	18	18	24	5	5	0.77
	SK40AD/B-M10-25	P2801707	10.5	18	20	44	25	5	0.79
	SK40AD/B-M10-50	P2801708	10.5	18	23	69	50	5	0.85
	SK40AD/B-M10-75	P2801709	10.5	18	28	94	75	5	0.87
	SK40AD/B-M10-100	P2801710	10.5	18	32	119	100	5	1.12
	SK40AD/B-M10-150	P2801711	10.5	18	36.5	169	150	5	1.38
	SK40AD/B-M12-50	P2801714	12.5	21	24	69	50	5	0.85
	SK40AD/B-M12-75	P2801715	12.5	21	31	94	75	5	1.02
	SK40AD/B-M12-100	P2801716	12.5	21	33	119	100	5	1.09
	SK40AD/B-M16-5	P2801718	17	29	29	24	5	5	0.77
	SK40AD/B-M16-25	P2801719	17	29	29	44	25	5	0.85
	SK40AD/B-M16-50	P2801720	17	29	34	69	50	5	1.00
	SK40AD/B-M16-75	P2801721	17	29	34	94	75	5	0.99
	SK40AD/B-M16-100	P2801722	17	29	36	119	100	5	1.34
	SK40AD/B-M16-150	P2801723	17	29	42.5	169	150	5	1.84
50	SK50AD/B-M16-50	P2801731	17	29	34	69	50	5	2.79
	SK50AD/B-M16-100	P2801732	17	29	36	119	100	10	3.00
	SK50AD/B-M16-150	P2801733	17	29	42.5	169	150	10	3.60

- ▶ Balancing grade G2.5 at 25,000 RPM or U max <math>< 1\text{ gmm}</math>.
- ▶ For the screw in milling cutters with thread.

SK
(DIN 69871)

CRT
(BT DUAL CONTACT)

BT
(JIS B6330/ANSI 403)

HSK
(DIN 69893/ISO 12164)

STRAIGHT TYPE & SET

ACCESSORY & PARTS