


SHRINK FIT HOLDER (Extra Slim) SFHS

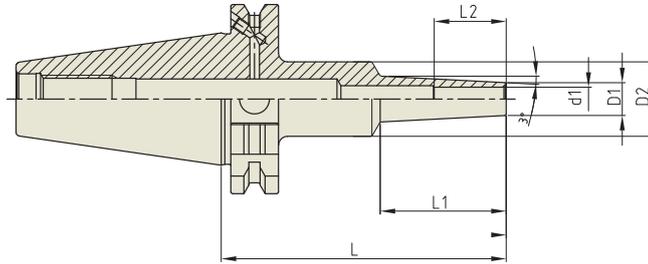

DIN 69871-SK

AT3

2.5G

25,000 RPM

(LD) ≤ 3μm

AD/B

Unit : mm

| TAPER No. | MODEL No. | EDP No. | d1 | D1 | D2 | L | L1 | L2 | WEIGHT (Kg) |
|-----------|---------------------|-----------|----|----|----|-----|----|----|-------------|
| 40 | SK40AD/B-SFHS3-95 | P2771338S | 3 | 6 | 25 | 95 | 42 | 9 | 0.89 |
| | SK40AD/B-SFHS3-120 | P2771339S | 3 | 6 | 25 | 120 | 67 | 9 | 0.91 |
| | SK40AD/B-SFHS4-95 | P2771340S | 4 | 7 | 25 | 95 | 42 | 12 | 0.90 |
| | SK40AD/B-SFHS4-120 | P2771341S | 4 | 7 | 25 | 120 | 67 | 12 | 0.92 |
| | SK40AD/B-SFHS6-95 | P2771342S | 6 | 9 | 25 | 95 | 42 | 18 | 0.90 |
| | SK40AD/B-SFHS6-120 | P2771343S | 6 | 9 | 25 | 120 | 67 | 18 | 0.93 |
| | SK40AD/B-SFHS8-95 | P2771344S | 8 | 11 | 25 | 95 | 42 | 24 | 0.90 |
| | SK40AD/B-SFHS8-120 | P2771345S | 8 | 11 | 32 | 120 | 67 | 24 | 1.01 |
| | SK40AD/B-SFHS10-95 | P2771346S | 10 | 13 | 25 | 95 | 42 | 30 | 0.91 |
| | SK40AD/B-SFHS10-120 | P2771347S | 10 | 13 | 32 | 120 | 67 | 30 | 1.02 |
| | SK40AD/B-SFHS12-95 | P2771348S | 12 | 15 | 32 | 95 | 42 | 30 | 0.99 |
| | SK40AD/B-SFHS12-120 | P2771349S | 12 | 15 | 32 | 120 | 67 | 30 | 1.02 |

► Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/MAS 403)

HSK (DIN 69893/ISO 12164)

STRAIGHT TYPE & SET

ACCESSORY & PARTS