


# SHRINK FIT HOLDER

SFH

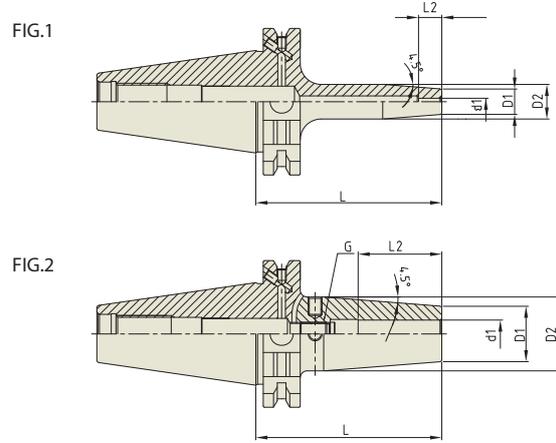


Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
40	SK40AD/B-SFH3-80	P2771301	3	11	15	80	10	-	1	1.00
	SK40AD/B-SFH3-120	P2771336	3	11	15	120	10	-	1	-
	SK40AD/B-SFH3-160	P2771337	3	11	15	160	10	-	1	-
	SK40AD/B-SFH4-80	P2771302	4	11	15	80	12	-	1	1.00
	SK40AD/B-SFH4-120	P2771340	4	11	15	120	12	-	1	-
	SK40AD/B-SFH4-160	P2771341	4	11	15	160	12	-	1	-
	SK40AD/B-SFH5-80	P2771303	5	11	15	80	15	-	1	1.00
	SK40AD/B-SFH5-120	P2771342	5	11	15	120	15	-	1	-
	SK40AD/B-SFH5-160	P2771343	5	11	15	160	15	-	1	-
	SK40AD/B-SFH6-80	P2554058	6	21	27	80	36	M5×0.8	2	1.10
	SK40AD/B-SFH6-120	P2554057	6	21	27	120	36	M5×0.8	2	-
	SK40AD/B-SFH6-160	P2771304	6	21	27	160	36	M5×0.8	2	1.15
	SK40AD/B-SFH8-80	P2600009	8	21	27	80	36	M6×1.0	2	1.11
	SK40AD/B-SFH8-120	P2771344	8	21	27	120	36	M6×1.0	2	-
	SK40AD/B-SFH8-160	P2771305	8	21	27	160	36	M6×1.0	2	1.15
	SK40AD/B-SFH10-80	P2554052	10	24	32	80	42	M8×1.0	2	1.10
	SK40AD/B-SFH10-120	P2554051	10	24	32	120	42	M8×1.0	2	-
	SK40AD/B-SFH10-160	P2771306	10	24	32	160	42	M8×1.0	2	1.15
	SK40AD/B-SFH12-80	P2600008	12	24	32	80	47	M10×1.0	2	1.10
	SK40AD/B-SFH12-120	P2771332	12	24	32	120	47	M10×1.0	2	-
	SK40AD/B-SFH12-160	P2771307	12	24	32	160	47	M10×1.0	2	1.15
	SK40AD/B-SFH16-80	P2554054	16	27	34	80	50	M12×1.0	2	1.20
	SK40AD/B-SFH16-120	P2771333	16	27	34	120	50	M12×1.0	2	-
	SK40AD/B-SFH16-160	P2554053	16	27	34	160	50	M12×1.0	2	1.50
	SK40AD/B-SFH18-80	P2771321	18	33	42	80	50	M12×1.0	2	1.30
	SK40AD/B-SFH20-80	P2554056	20	33	42	80	52	M16×1.0	2	1.60
	SK40AD/B-SFH20-120	P2771334	20	33	42	120	52	M16×1.0	2	-
	SK40AD/B-SFH20-160	P2554055	20	33	42	160	52	M16×1.0	2	1.70
	SK40AD/B-SFH25-90	P2771323	25	44	53	90	58	M16×1.0	2	1.70
	SK40AD/B-SFH25-100	P2771335	25	44	53	100	58	M16×1.0	2	-
	SK40AD/B-SFH25-160	P2771324	25	44	53	160	58	M16×1.0	2	2.00
	SK40AD/B-SFH32-100	P2771338	32	44	53	100	63	M16×1.0	2	-
SK40AD/B-SFH32-160	P2771339	32	44	53	160	63	M16×1.0	2	-	

► Supplied without balancing screws.  
 ► Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.

► NEXT PAGE

# SHRINK FIT HOLDER SFH

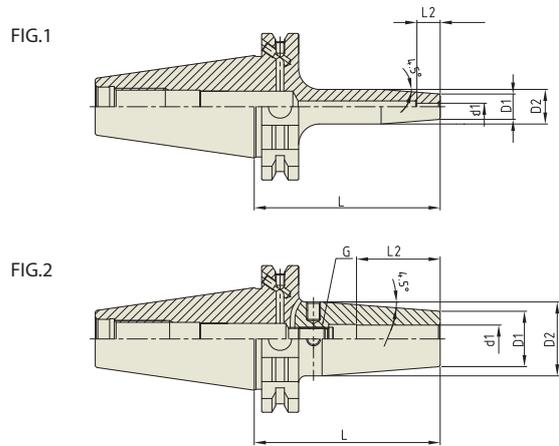

										Unit : mm
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
50	SK50AD/B-SFH5-80	P2771327	5	11	15	100	15	-	1	1.50
	SK50AD/B-SFH6-80	P2771328	6	21	27	80	36	M5×0.8	2	1.50
	SK50AD/B-SFH8-80	P2760010	8	21	27	80	36	M6×1.0	2	1.50
	SK50AD/B-SFH8-160	P2760015	8	21	27	160	36	M6×1.0	2	2.00
	SK50AD/B-SFH10-80	P2761010	10	24	32	80	42	M8×1.0	2	1.50
	SK50AD/B-SFH12-80	P2762010	12	24	32	80	47	M10×1.0	2	1.50
	SK50AD/B-SFH12-160	P2762015	12	24	32	160	47	M10×1.0	2	2.00
	SK50AD/B-SFH16-80	P2764010	16	27	34	80	50	M12×1.0	2	1.60
	SK50AD/B-SFH16-160	P2764015	16	27	34	160	50	M12×1.0	2	2.10

- ▶ Supplied without balancing screws.
- ▶ Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.

SK  
(DIN 69871)

CBT  
(BT DUAL CONTACT)

BT  
(JIS B6339/MAS 403)

HSK  
(DIN 69893/ISO 12164)

STRAIGHT TYPE & SET

ACCESSORY & PARTS