

80110A High temperature angled surface probe

General

Application	Surface temperature measurement
Construction	Springloaded thermocouple
Measuring point	Angle 90°
Handle	ABS plastic

Sensor

Thermocouple	Type K
Accuracy	According IEC 60584-1
Response time	2 seconds
Max. tip temperature	900°C / 1652°F

Sensor


Material	Stainless Steel
Tip insulation	Ceramic
Probe diameter	8 mm
Length	130 mm
Height	50 mm

Cable

Connection cable	Coiled cable, polyurethane insulated
Cable length	1000 mm
Type	K
Color	Black
Connector	Miniature thermocouple connector, flat pins

Options

Cable Color	IEC / ANSI
Connector color	IEC / ANSI

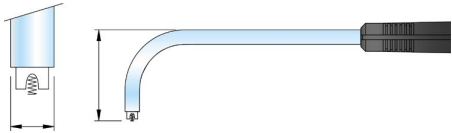

Ordering code

Model	<table border="1"><tr><td>80110A</td><td></td></tr></table>	80110A	
80110A			