
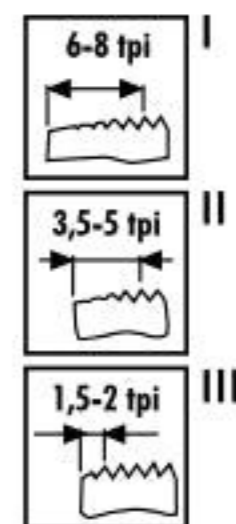


**2302****HSS DIN 352**M  
DIN 13Tol.  
**6H****TIN**

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
●	○								●	●							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

Macho 3°  
Taraud 3° } PVP = €/3  
Tap 3°

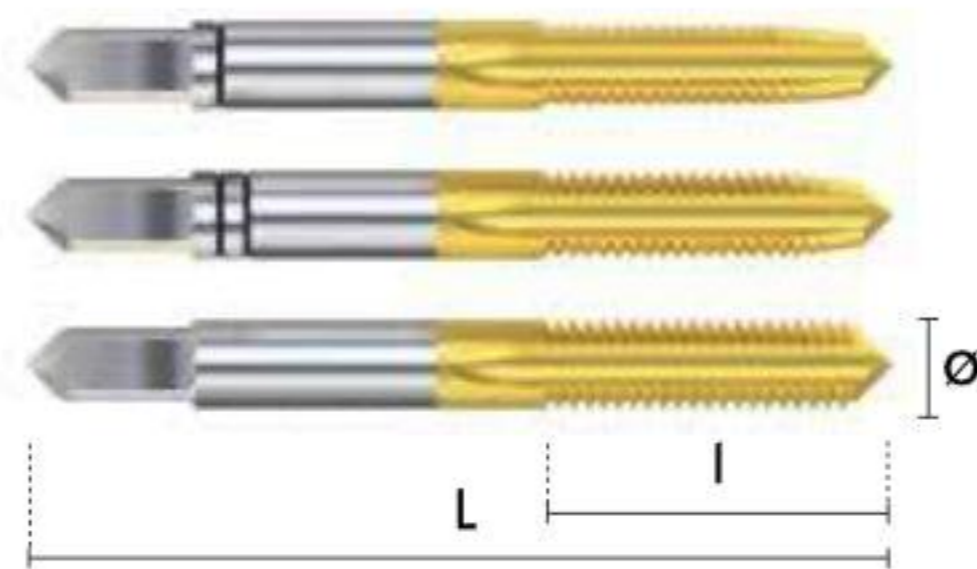

Ø	P	Nº
M3,0	0,50	3
M4,0	0,70	3
M5,0	0,80	3
M6,0	1,00	3
M8,0	1,25	3

L mm	l mm	mm	d mm
40	11	2,70	3,5
45	13	3,40	4,5
50	16	4,90	6,0
56	19	4,90	6,0
63	22	4,90	6,0

Ø	P	Nº
M10,0	1,50	3
M12,0	1,75	3
M14,0	2,00	3
M16,0	2,00	3
M20,0	2,50	3

L mm	l mm	mm	d mm
70	24	5,50	7,0
75	28	7,00	9,0
80	30	9,00	11,0
80	32	9,00	12,0
95	34	12,00	16,0