

2312

HSS DIN 40432


PG

DIN 40430



P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
●									●	●							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

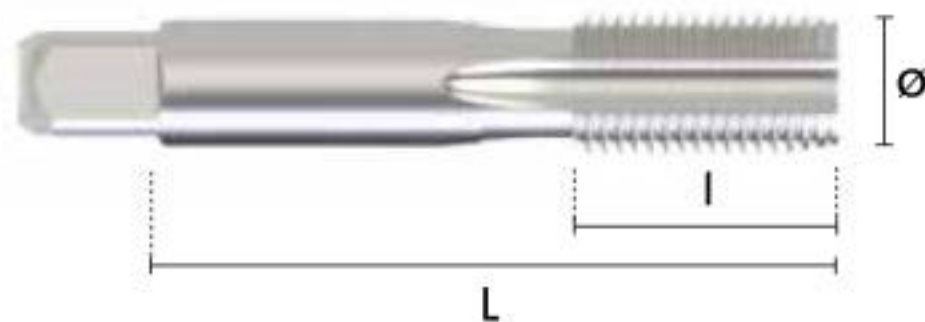

PG	Ø	P	Nº
7,0	12,5	20,00	1
9,0	15,2	18,00	1
11,0	18,6	18,00	1
13,5	20,4	18,00	1
16,0	22,5	18,00	1

L	l	∅	d
mm	mm	mm	mm
70	22	7,00	9,0
70	22	9,00	12,0
80	22	11,00	14,0
80	22	12,00	16,0
80	22	14,50	18,0

PG	Ø	P	Nº
21,0	28,3	16,00	1
29,0	37,0	16,00	1
36,0	47,0	16,00	1
42,0	54,0	16,00	1
48,0	59,3	16,00	1

L	l	∅	d
mm	mm	mm	mm
90	22	18,00	22,0
100	25	22,00	28,0
140	40	29,00	36,0
140	40	32,00	40,0
160	40	35,00	45,0