


**2304/5****HSS DIN 352**

Izquierda / A gauche / Left hand

BSW



BS 84

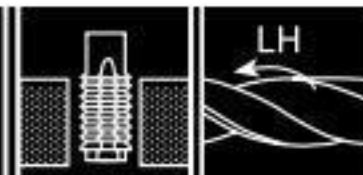

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
●									●	●							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

Macho 3°  
Taraud 3° } PVP = €/3  
Tap 3°

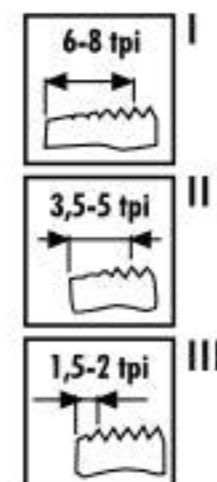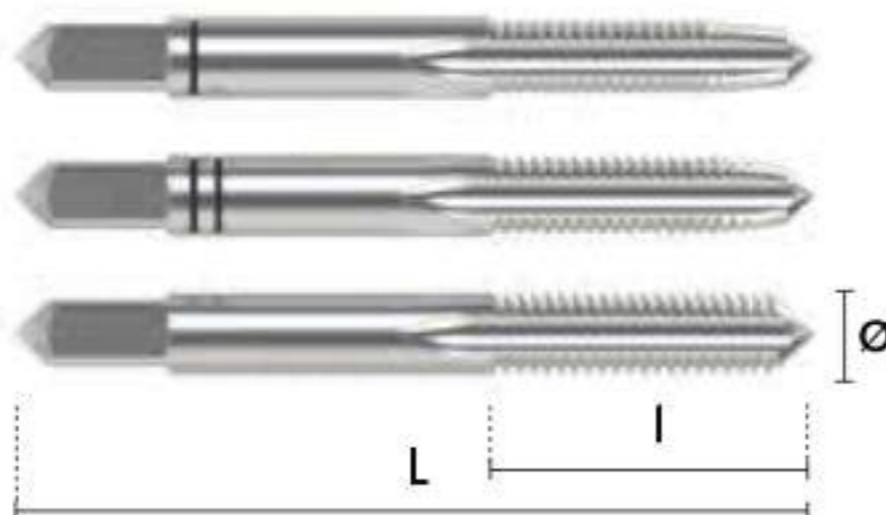

Ø	P	Nº
1/8	40,00	3
5/32	32,00	3
3/16	24,00	3
1/4	20,00	3
5/16	18,00	3
3/8	16,00	3
7/16	14,00	3

L mm	l mm	mm	d mm
40	12	2,70	3,5
45	14	3,40	4,5
50	18	4,90	6,0
50	19	4,90	6,0
56	22	4,90	6,0
70	24	5,50	7,0
70	24	6,20	8,0

Ø	P	Nº
1/2	12,00	3
9/16	12,00	3
5/8	11,00	3
3/4	10,00	3
7/8	9,00	3
1"	8,00	3

L mm	l mm	mm	d mm
75	29	7,00	9,0
80	30	9,00	11,0
80	32	9,00	12,0
95	40	11,00	14,0
100	40	14,50	18,0
110	50	14,50	18,0