

BSF

British standard BS 84 whitworth coarse thread


Efficient internal thread cutting.

The short structural type makes that tap usable by hand. The Short-Machine-Tap is also usable by machine.


A Hand-Tap-Set includes 2 taps:

Taper Tap



Finish Tap

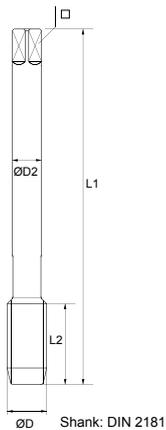


Short Machine Taps Form D for through holes and blind holes

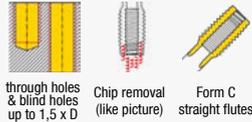


through holes & blind holes up to 1,5 x D
Chip removal (like picture)
Form C straight flutes

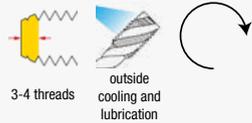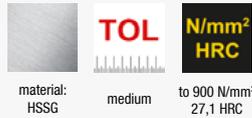

Hand Tap Sets for general use

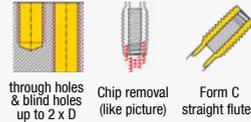

through holes & blind holes up to 2 x D
Chip removal (like picture)
Form C straight flutes

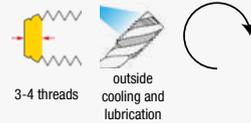

BSF

	D1	D2	L1	L2			No.	€	No.	€
BSF 3/16 x 32	4,76	6,0	50	14	4,9	3,90	220101001	6,75	220301001	9,83
BSF 1/4 x 26	6,35	6,0	50	18	4,9	5,30	220101002	6,75	220301002	9,83
BSF 5/16 x 22	7,94	6,0	56	22	4,9	6,80	220101003	7,58	220301003	10,99
BSF 3/8 x 20*	9,53	7,0	63	22	5,5	8,30	220101004	8,43	220301004	12,16
BSF 7/16 x 18	11,11	8,0	63	22	6,2	9,70	220101005	10,62	220301005	15,44
BSF 1/2 x 16	12,70	9,0	75	24	7,0	11,10	220101006	12,81	220301006	18,71
BSF 9/16 x 16	14,29	11,0	80	28	9,0	12,70	220101007	16,86	220301007	24,56
BSF 5/8 x 14	15,88	12,0	80	28	9,0	14,00	220101008	18,87	220301008	27,60
BSF 3/4 x 12	19,05	14,0	95	32	11,0	16,80	220101009	25,28	220301009	36,95
BSF 7/8 x 11	22,23	18,0	100	36	14,5	19,70	220101010	33,71	220301010	49,12
BSF 1" x 10	25,40	18,0	110	40	14,5	22,70	220101011	38,76	220301011	56,61

* BSF 3/8 = Fisher thread