

G(BSP) Whitworth PIPE THREADS DIN ISO 228/1

Bright

TC727

TiN





TD727

▶ Suitable for tapping through holes due to special flute geometry and excellent chip evacuation.

DIN 5156


Hole type

3.0×D

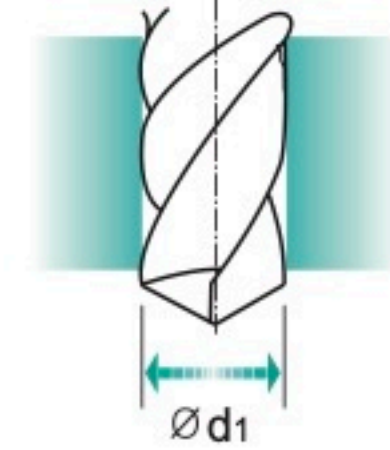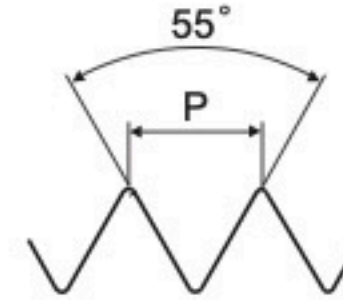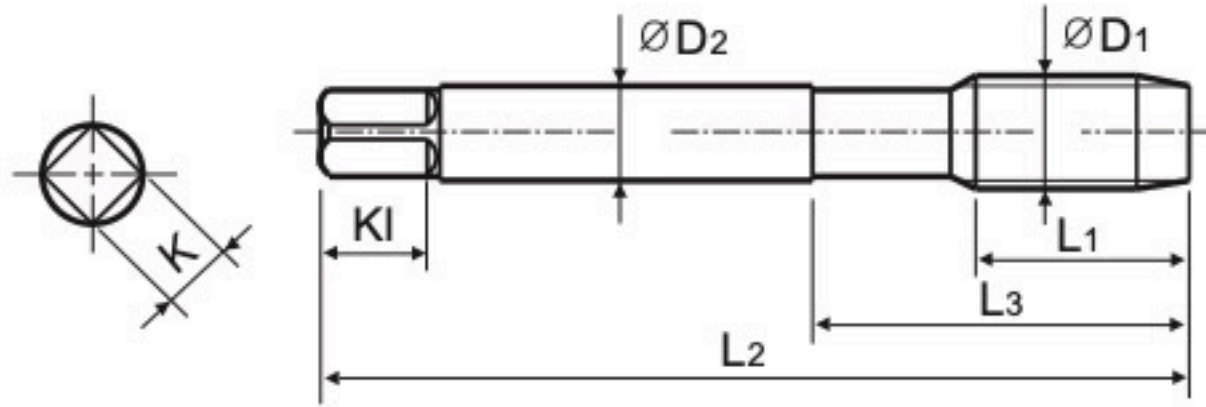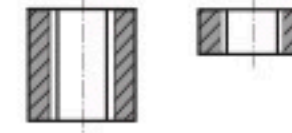

Machine taps

 * **NEW SERIES** Unit : mm

| SIZE | TPI | EDP No. | | Thread Length | Overall Length | Neck Length | Shank Diameter | Square Size | Square Length | No. of Flute | Tapping Drill Diameter |
|-----------|-----|----------|------------|---------------|----------------|-------------|----------------|-------------|---------------|--------------|------------------------|
| | | Bright | TiN | | | | | | | | |
| ØD1 | | | | L1 | L2 | L3 | ØD2 | K | KI | Z | Ød1 |
| G1/8 - 28 | | TC727200 | * TD727200 | 20 | 90 | 36 | 7 | 5.5 | 8 | 3 | 8.8 |
| G1/4 - 19 | | TC727400 | * TD727400 | 22 | 100 | 40 | 11 | 9 | 12 | 3 | 11.8 |
| G3/8 - 19 | | TC727480 | * TD727480 | 22 | 100 | 40 | 12 | 9 | 12 | 3 | 15.25 |
| G1/2 - 14 | | TC727560 | * TD727560 | 25 | 125 | 50 | 16 | 12 | 15 | 4 | 19 |
| G3/4 - 14 | | TC727700 | * TD727700 | 28 | 140 | 54 | 20 | 16 | 19 | 4 | 24.5 |
| G1 - 11 | | TC727780 | * TD727780 | 30 | 160 | 60 | 25 | 20 | 23 | 4 | 30.75 |

◎ : Excellent ○ : Good

| ISO | P | | | | | | | | | | | M | | | | K | | | | |
|----------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|------------------------------------|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|-----|-----|
| | Non-alloy steel | | | | | Low alloy steel | | | | High alloyed steel, and tool steel | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron | | |
| Material Description | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| VDI 3323 | | | | | | | | | | | | | | | | | | | | |
| HRc | | | | | | | | | | | | | | | | | | | | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | | | | | | | | | | ◎ | ◎ | | |

| ISO | N | | | | | | | | S | | | | | | | H | | | | | |
|----------------------|------------------------|-----|------------------------|----|-----|---|----|-----|------------------------|-----------------------------|-----|-----|-----|-----------------|-----|--------|----------------|-----|-------------------|--------------------|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | Heat Resistant Super Alloys | | | | Titanium Alloys | | | Hardened steel | | Chilled Cast Iron | Hardened Cast Iron | |
| Material Description | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| VDI 3323 | | | | | | | | | | | | | | | | | | | | | |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ◎ | ◎ | ○ | | | | | | | | | | | | | | |